HFE80V-20B

DIRECT CURRENT RELAY



Features

- Pre-charging relay for new energy automobile.
- Carrying current 20A continuously at 85°C.
- The electricity safety meets the requirements of IEC 60664-1.

RoHS compliant

CONTACT DATA

Contact arrangement	1 Form A					
Contact resistance	≤5mΩ(at 1A)					
Contact rating	20A					
Mechanical endurance	2x10⁵op					
Max. switching voltage	750 VDC					
Max. breaking current	30A(450 VDC) 5op					
Max. switching power	18kW					
Electrical ¹⁾ endurance	Making:7.5 x 10⁴ops(450 VDC, 20A)					
	Switching:3 x 10 ³ ops(450 VDC, 20A)					
Current carrying ²⁾ capacity	20A:Cont.					
	30A:1h					
	40A:20min					
	80A:30s					
	120A:10s					
	200A: 0.6s					

Notes: 1) Unless otherwise specified, the temperature of eletrical endurance is at 23°C and the on-off ratio is 0.6s:5.4s.

The coil was not connected to the surge suppression device during the test. Please note that the use of a well-connected diode will greatly increase the release time of the relay, resulting in a reduced lifetime.

2) Ambient temperature is at 85° C and cross section area of wire is $4mm^2$ min. See Fig. Endurance Capacity Curve for more information.

COIL			23°C
Rated Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Coil power W
12	≤9	≥1	3
24	≤18	≥2	3

CHARACTERISTICS

Insulation resistance		1000MΩ (500 VDC)				
Dielectric	Between coil & contacts	3000 VAC 1min				
strength	Between open contacts	2500 VAC 1min				
Operate time (at rated volt.)		≤30ms				
Release time (at rated volt.)		≤10ms				
Shock resistance	Functional	196m/s ²				
	Destructive	490m/s ²				
Vibration resistance		10Hz ~ 500Hz 49m/s ²				
Humidity		5% ~ 85% RH				
Ambient temperature		-40°C ~ 85°C				
Load terminal structure		QC terminal				
Unit weight		Approx.59g				
Outline Dimensions		40.0x30.0x42.7mm				

Notes: Above is the initial vale in the room temperature




ORDERING INFORMATION												
HFE80	V	-20	B/	450-	12-	Н	Т	Q	2	A	J	(XXX)
Туре												
Application V: Vel	nicle											
Contact rating	20: 20	AC										
Series breakdown	B: B :	series										
Load voltage	450: 4	450:450 VDC										
Coil voltage	12: 12 VDC 24: 24 VDC											
Contact arrangement	H: 1 Form A											
Contact material	T: Ag	T: AgSnO ₂										
Coil terminal structure	Q: QC terminal											
Load terminal structurel 2: QC terminal												
Shell structure	A: A type mounting flange B: B type mounting flange											
Base structure J: Layout base without mounting boss												
Special code ¹⁾ XXX: Customer special requirement Nil: Standard												
Notes: 1) The customer special regu	irement e		enocial	code after	evaluating	by Hon	nfa					

Notes: 1) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, MOUNTING HOLE, TERMINAL ARRANGEMENT




HFE80V-20B/450-XXX-HTQ2LJ

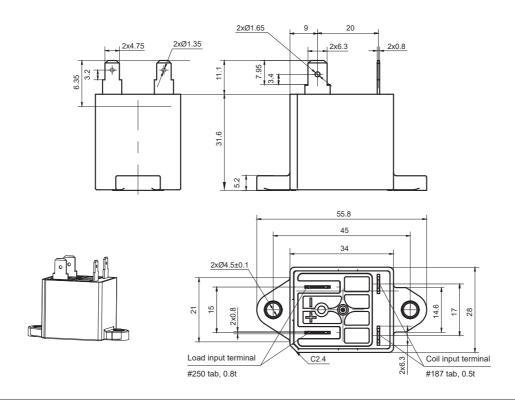


Unit: mm





HFE80V-20B/450-XX-HTQ2BJ

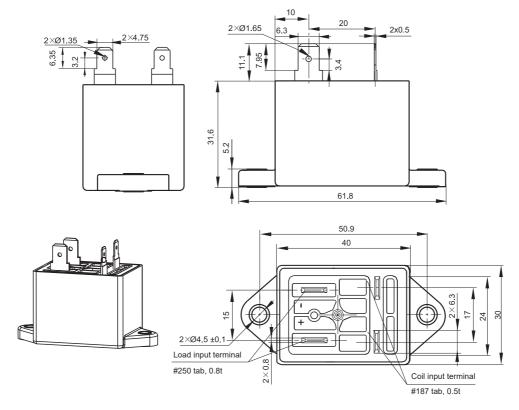

Terminal Arrangement





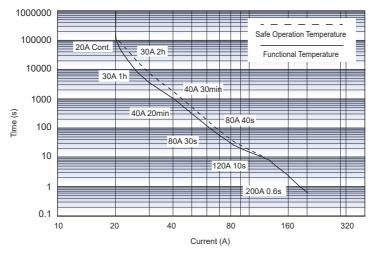


Endurance Capacity Curve

Notes:

1. The upper limit of safe operation temperature and functional temperature are 180°C and 130°C respectively.

2.If the product needs to be operated for a long time, the upper temperature limit should not exceed 130°C. 3.The ambient temperature is 85°C, and the cross-sectional area of the wire is ≥4mm².

4. The energized voltage of coil refers to the rated coil voltage.

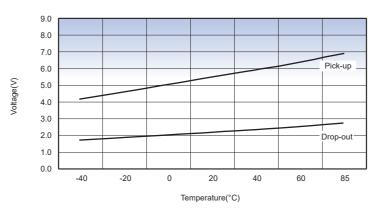

Pick-up Voltage / Drop-out Voltage Curve

CAUTIONS

1.In case of loosening, please use M4 screw for HTQ2BJ terminal mounting, and the screw tightening torque shall be within 2N.m to 3N.m, The push and pull force for terminals is 49N for load terminals and 49N for coil terminals. The torque beyond the range may cause damage.

2. Be careful that oils and foreign matter do not stick to the main terminal part and please use the wire with min. cross section area 4mm², otherwise the terminal parts may have abnormal heating.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co.,Ltd. All rights of Hongfa are reserved.