

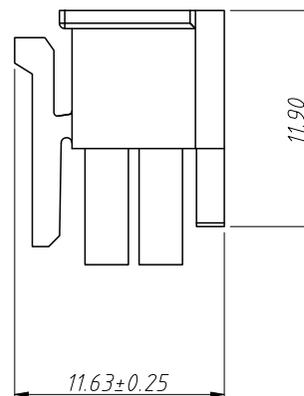


RoHS Compliance



REV	SYM	Revision Record	Appr.	Date
V0	KLS01140	New Version Release	Song	2023-12-27

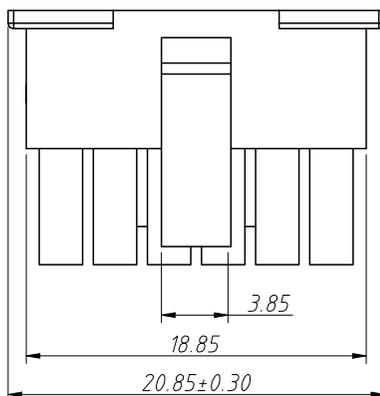

Notes:
 1.Material:
 Housing:PA66,UL 94 V-0,Black

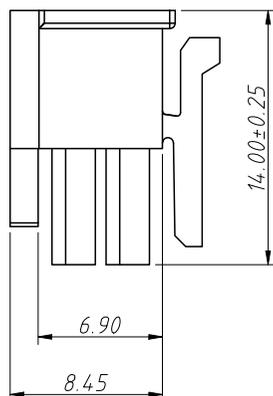

2.Electric:
 Voltage Rating:250V AC,DC
 Current Rating:5A AC,DC
 Withstanding Voltage:1500V AC/minute
 Insulation Resistance:1000MΩ Min
 Temperature Range:-25°C ~ +85°C
 Poles:12+4P

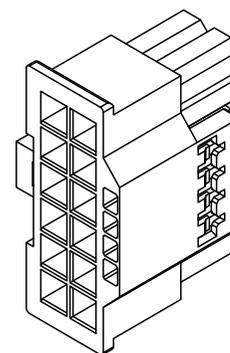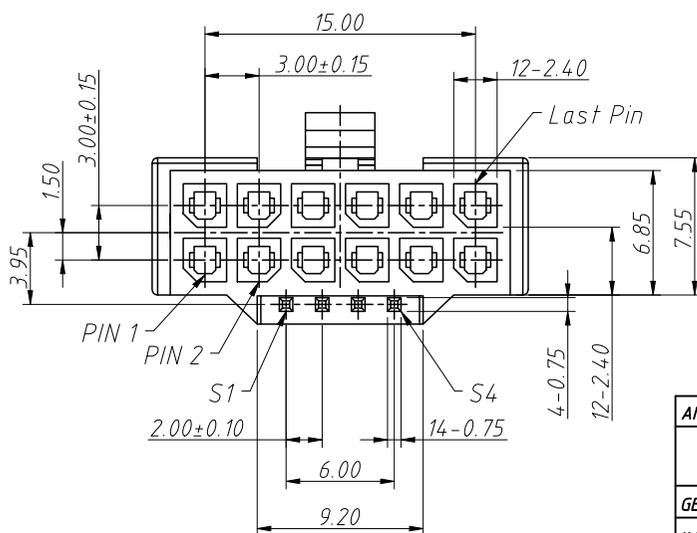

Order Information

L-KLS1-XM4-3.00-2x06D-M H

- RoHS
- Wire To Board
- Pitch:3.00mm
- 2-Double Layer
- XX-No. of Pins
- M-Male
- H-Housing

ANGLE TOLERANCE	PROJECTION	Description:	Pitch 3.00mm 12+4P PCIe Housing	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XM4-3.00-2x06D-MH
x.x ±0.25	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2023-12-27	
x.xxx ±0.05	Check:	Daniel	2023-12-27	

NingBo KLS ELECTRONIC CO.,L TD.