


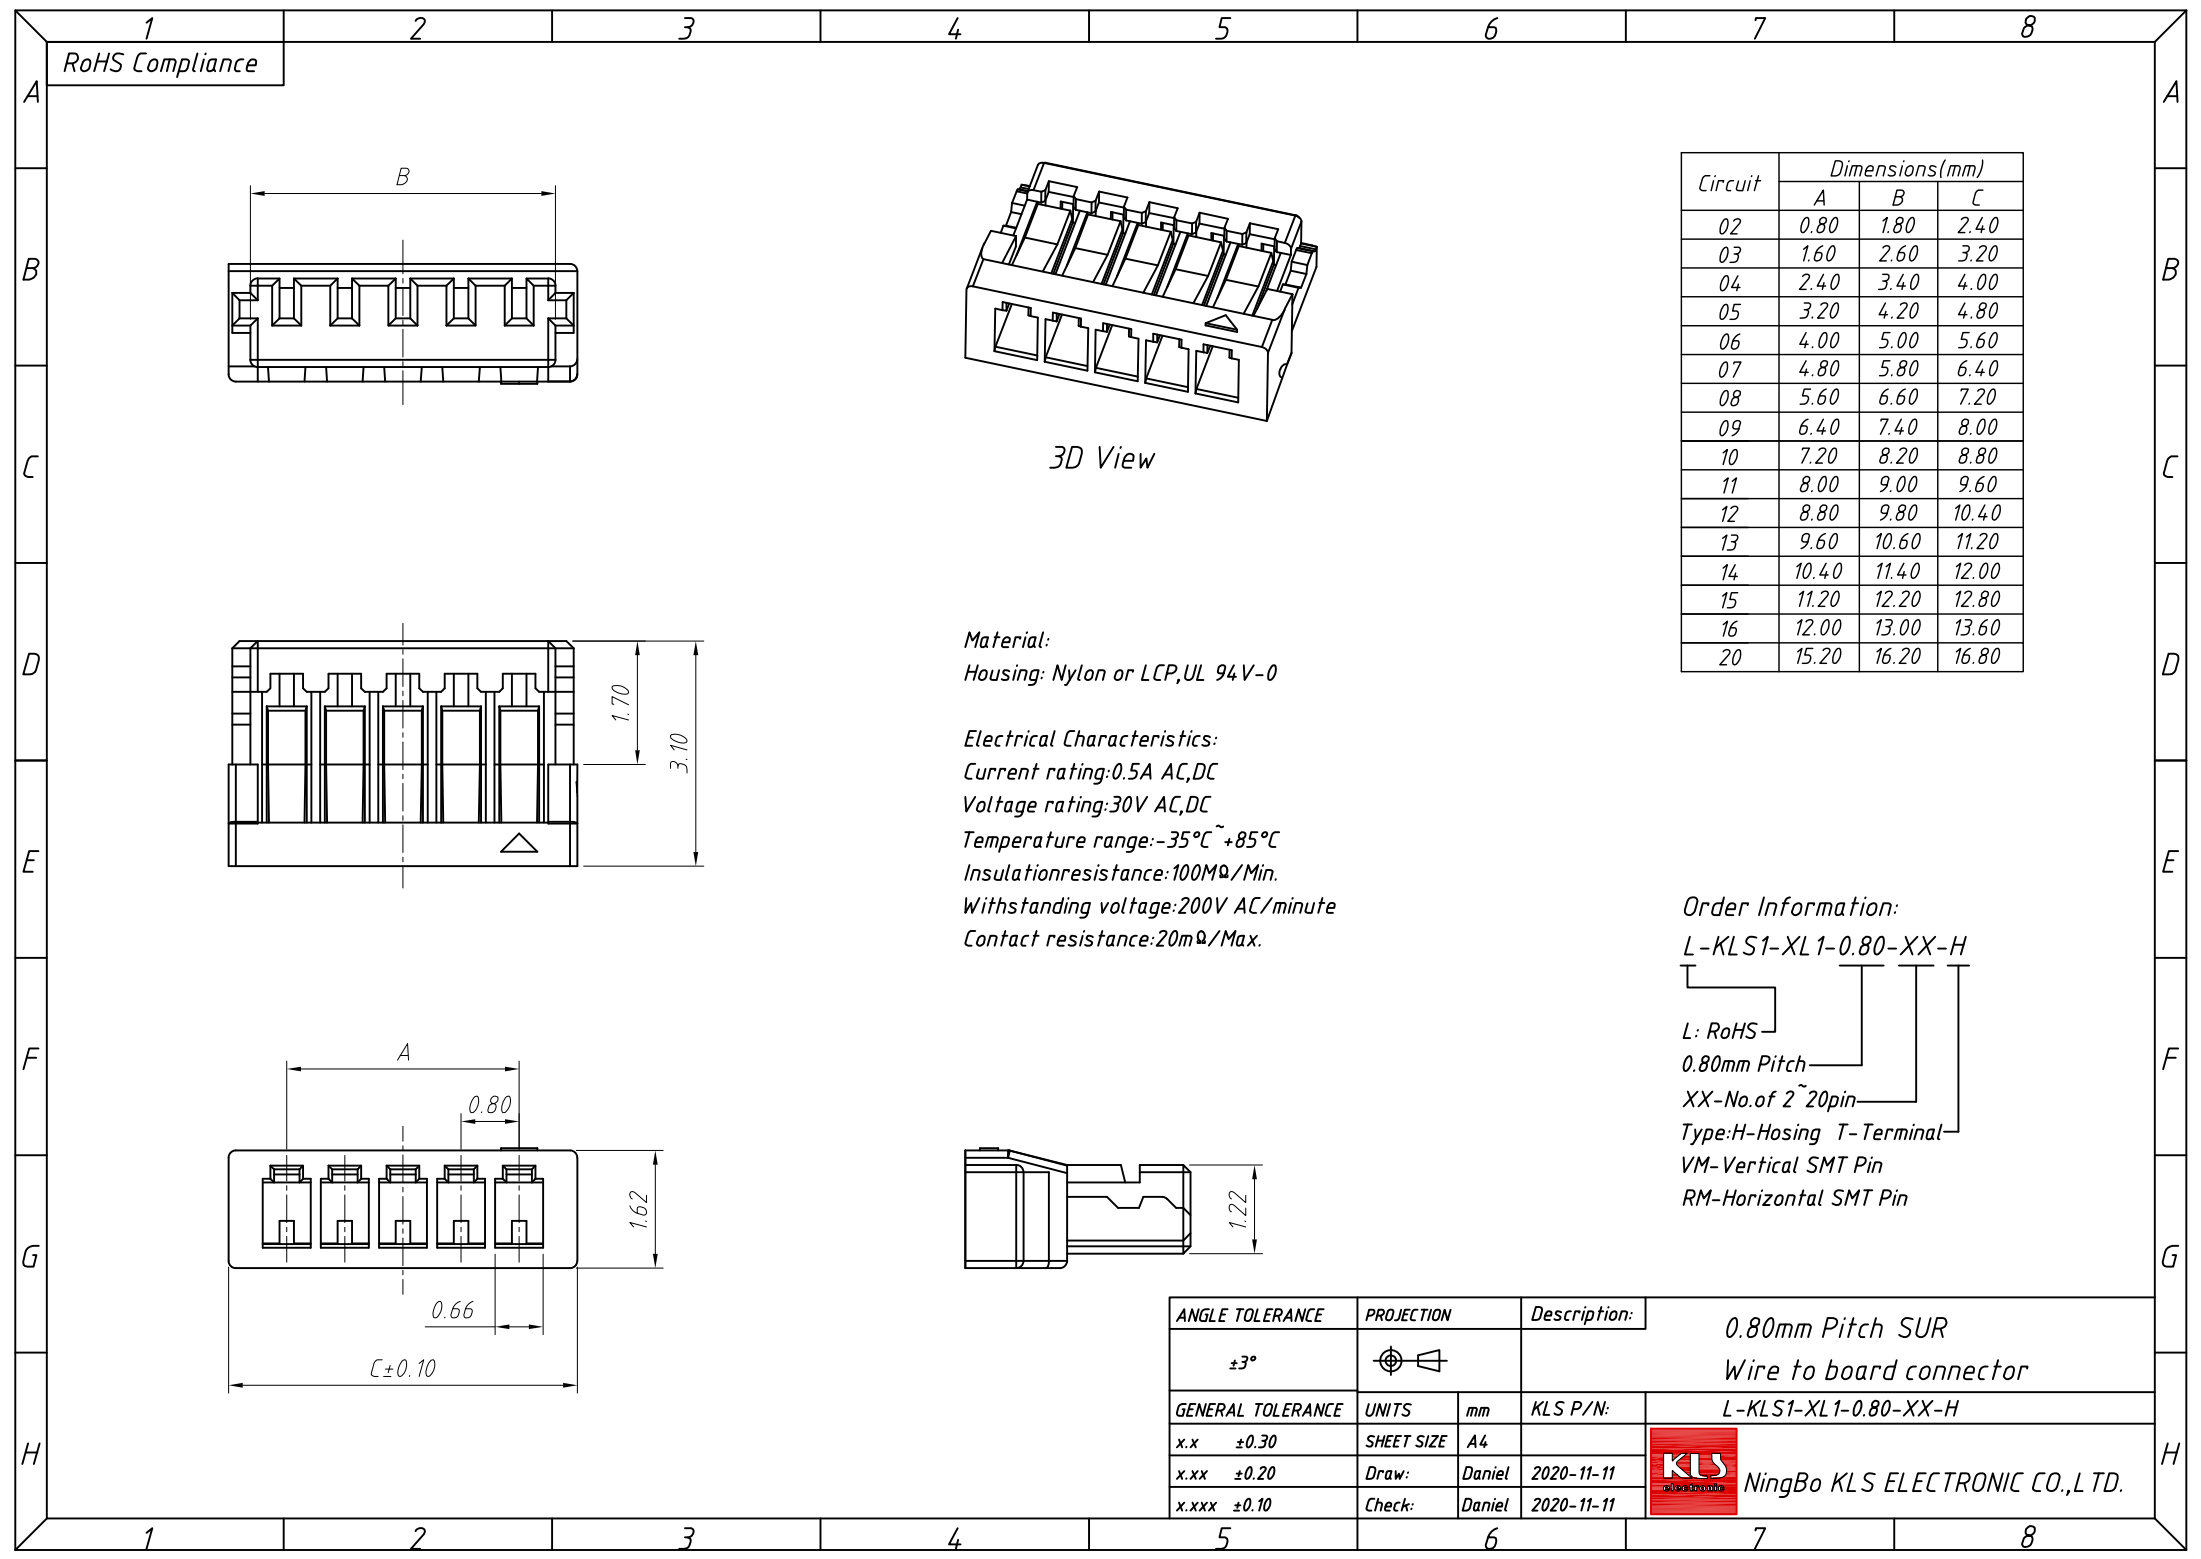

1
RoHS Compliance

2

3



4

5

6


7

8

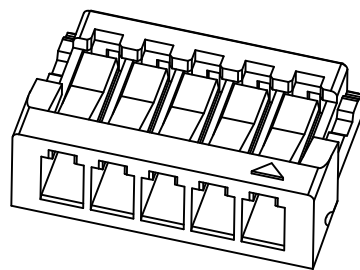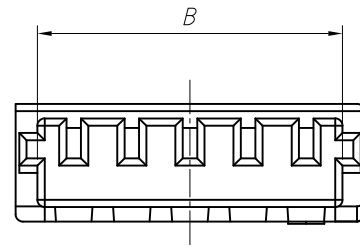

3D View

Circuit	Dimensions(mm)		
	A	B	C
02	0.80	1.80	2.40
03	1.60	2.60	3.20
04	2.40	3.40	4.00
05	3.20	4.20	4.80
06	4.00	5.00	5.60
07	4.80	5.80	6.40
08	5.60	6.60	7.20
09	6.40	7.40	8.00
10	7.20	8.20	8.80
11	8.00	9.00	9.60
12	8.80	9.80	10.40
13	9.60	10.60	11.20
14	10.40	11.40	12.00
15	11.20	12.20	12.80
16	12.00	13.00	13.60
20	15.20	16.20	16.80


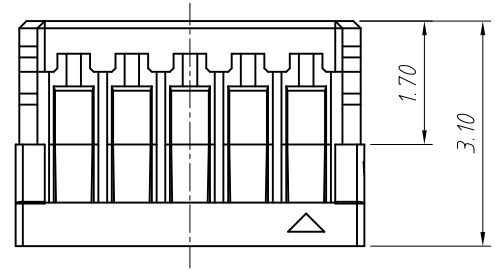


Material:
Housing: Nylon or LCP,UL 94 V-0

Electrical Characteristics:
Current rating:0.5A AC,DC
Voltage rating:30V AC,DC
Temperature range:-35℃~+85℃
Insulation resistance:100MΩ/Min.
Withstanding voltage:200V AC/minute
Contact resistance:20mΩ/Max.

Order Information:
L-KLS1-XL1-0.80-XX-H

L: RoHS
0.80mm Pitch
XX-No.of 2~20pin
Type:H-Hosing T-Terminal
VM-Vertical SMT Pin
RM-Horizontal SMT Pin

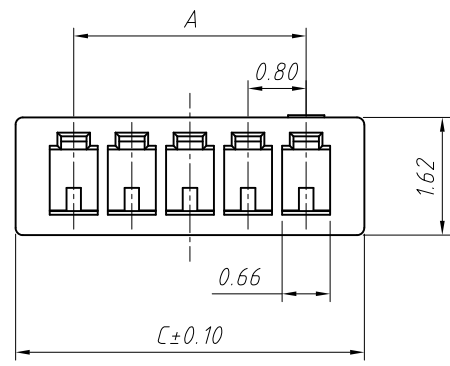

ANGLE TOLERANCE	PROJECTION		Description:		
±3°			0.80mm Pitch SUR Wire to board connector		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XL1-0.80-XX-H	
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx ±0.20	Draw:	Daniel			2020-11-11
x.xxx ±0.10	Check:	Daniel			2020-11-11