
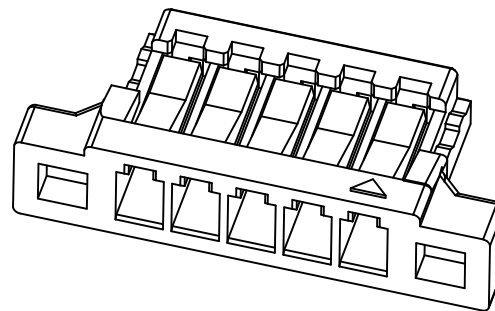


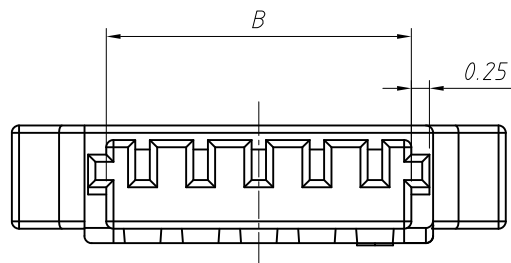

3D View

Circuit	Dimensions(mm)		
	A	B	C
02	0.80	1.80	4.40
03	1.60	2.60	5.20
04	2.40	3.40	6.00
05	3.20	4.20	6.80
06	4.00	5.00	7.60
07	4.80	5.80	8.40
08	5.60	6.60	9.20
09	6.40	7.40	10.00
10	7.20	8.20	10.80
11	8.00	9.00	11.60
12	8.80	9.80	12.40
13	9.60	10.60	13.20
14	10.40	11.40	14.00
15	11.20	12.20	14.80
16	12.00	13.00	15.60
20	15.20	16.20	18.80

Material:

Housing: Nylon or LCP,UL 94V-0

Electrical Characteristics:

Current rating:0.5A AC,DC




Voltage rating:30V AC,DC

Temperature range:-35°C~+85°C

Insulation resistance:100MΩ/Min.


Withstanding voltage:200V AC/minute

Contact resistance:20mΩ/Max.

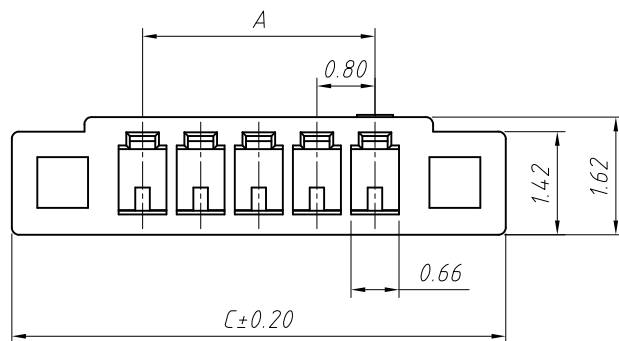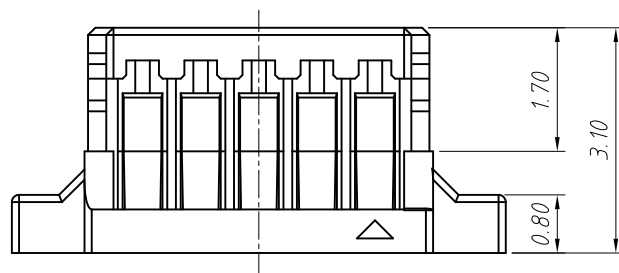

Order Information:

L-KLS1-XL1-0.80-XX-H2



L: RoHS

0.80mm Pitch

XX-No. of 2~20pin

Type:H2-Hosing T-Terminal

VM-Vertical SMT Pin

RM-Horizontal SMT Pin

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		0.80mm Pitch SUR	
GENERAL TOLERANCE		Wire to board connector	
x.x ±0.30	UNITS	mm	L-KLS1-XL1-0.80-XX-H2
x.xx ±0.20	SHEET SIZE	A4	
x.xxx ±0.10	Draw:	Daniel	2020-11-11
	Check:	Daniel	2020-11-11



NingBo KLS ELECTRONIC CO.,LTD.