
# A. SCOPE

This specification applies SMD piezo buzzer, Passive drive type, L-KLS3-SMT-12\*03

## **B. SPECIFICATION**

No.	ltem	Unit	Specification	Condition
1	Oscillation Frequency	Hz	4000	Square Wave
2	Operating Voltage	Vр-р	1~25	
3	Rated Voltage	Vр-р	3	
4	Current Consumption	mA	MAX. <mark>5</mark>	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 75	at 10cm at Rated Voltage
6	Electrostatic Capacity	pF	16000±30%	at 100Hz 1V
7	Operating Temperature	°C	-40~ +85	
8	Storage Temperature	°C	-40 ~ +95	
9	Dimension	mm	12 x 12 x H3	See appearance drawing
10	Weight (MAX)	gram	0.4	
11	Housing Material		LCP(Black)	
12	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
13	Environmental Protection Regulation		RoHS	

# C. APPEARANCE DRAWING

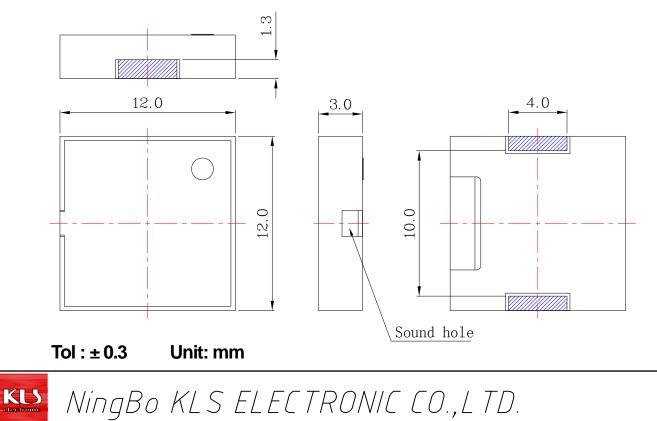


### D.TESTING METHOD Standard Measurement conditions


Temperature:25±2°C Humidity:45-65%

# Acoustic Characteristics:

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

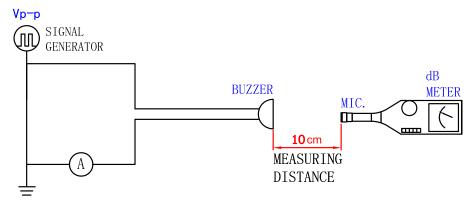

#### In the measuring test, buzzer is placed as follows:

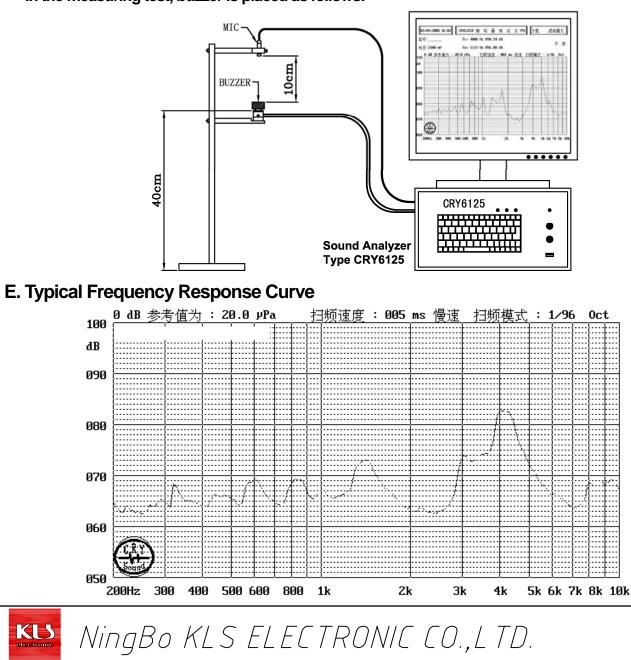


## F. Soldering Condition

(1)Recommendable reflow soldering condition is as follows

(Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed

after heat of product goes down to normal.

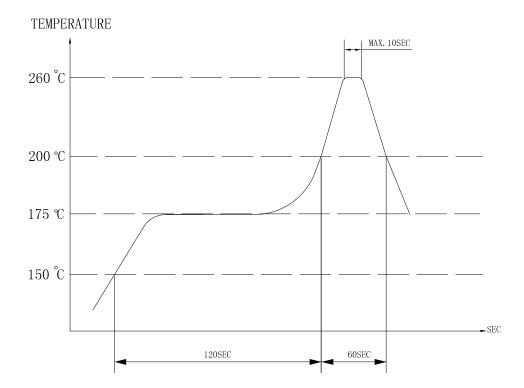

Heat resistant line

(Used when heat resistant reliability test is performed)

(2)Manual soldering

Manual soldering temperature 350 °C within 5 sec.



NingBo KLS ELECTRONIC CO.,LTD.


# **G. RELIABILITY TEST**

NO.	ITEM	TEST CONDITION AND REQUIREMENT		
	High Temperature	After being placed in a chamber with 80±2°C for 96 hours and then		
1		being placed in normal condition for 2 hours.		
	Test (Storage)	Allowable variation of SPL after test: ±10dB.		
	Low Temperature Test (Storage)	After being Placed in a chamber with -30±2°C for 96 hours and then		
2		being placed in normal condition for 2 hours.		
		Allowable variation of SPL after test: ±10dB.		
	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96		
3		hours and then being placed in normal condition for 2 hours.		
		Allowable variation of SPL after test: ±10dB.		
	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of :		
		+70°C		
		+25°C +25°C		
4				
		- 20°C		
		-0.5 hr = 0.5 + 0.25 = 0.5 = 0.5 = 0.5 = 0.5 = 0.25		
		3hours		
		Allowable variation of SPL after test: ±10dB.		
	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times,		
5		at the height of 75cm.		
		Allowable variation of SPL after test: ±10dB.		
	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz		
6		band of vibration frequency to each of 3 perpendicular directions for		
		2 hours.		
		Allowable variation of SPL after test: ±10dB.		
	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then		
7		immersed in solder bath of $+300\pm5^{\circ}$ C for $3\pm1$ seconds . 90% min. lead terminals shall be wet with solder		
		(Except the edge of terminals).		
		The force of 9.8N(1.0kg) is applied to each terminal in axial direction for		
8	Terminal Strength	1 ne force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds.		
0	Pulling Test	No visible damage and cutting off.		
TEST	ONDITION.			
	Test Condition :	a) Temperature : +5 ~ +35 $^\circ$ C b) Humidity : 45-85% c) Pressure : 860-1060mbar		
	一般测试条件 :	a) 温度:+5~+35℃ b) 湿度:45-85% c) 气压:860-1060mbar		
	nt Test Condition :	a) Temperature : $+25 \pm 2^{\circ}$ b) Humidity : 60-70% c) Pressure : 860-1060mbar		
3 -	· · · ·			

ent lest Condition : a) Iemperature : +25 ± 2 ℃ b) Humidity : 60-70% c) Pressure : 860-1060mbar 争议时测试条件 : a) 温度 : +25 ± 2 ℃ b) 湿度 : 60-70% c) 气压 : 860-1060mbar



NingBo KLS ELECTRONIC CO.,LTD.

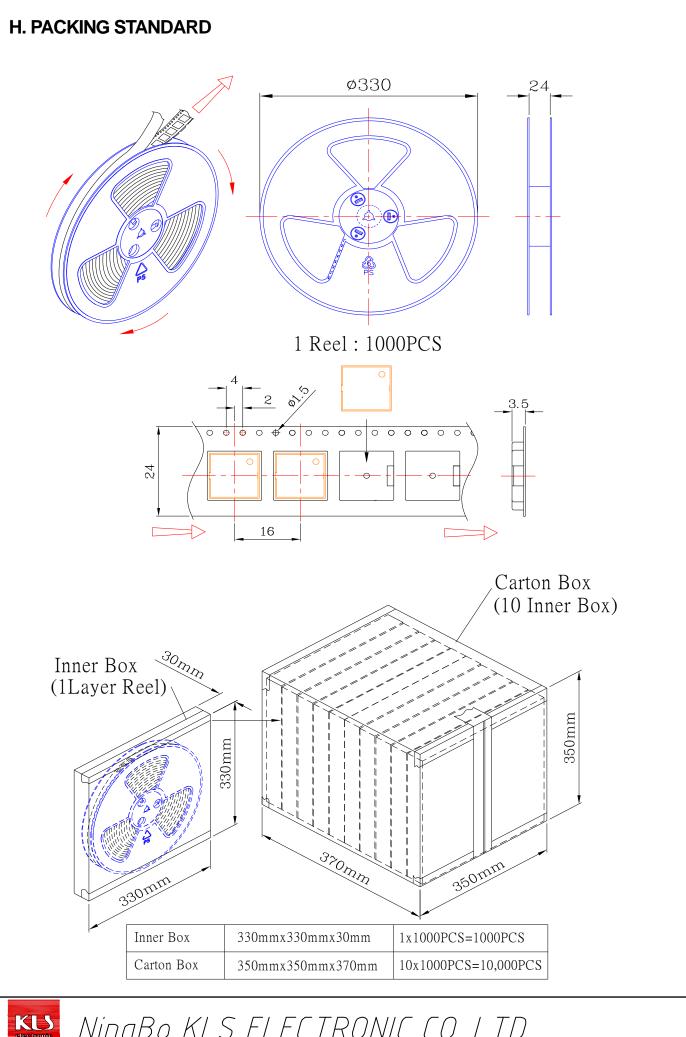

NingBo KLS ELECTRONIC CO.,LTD.