


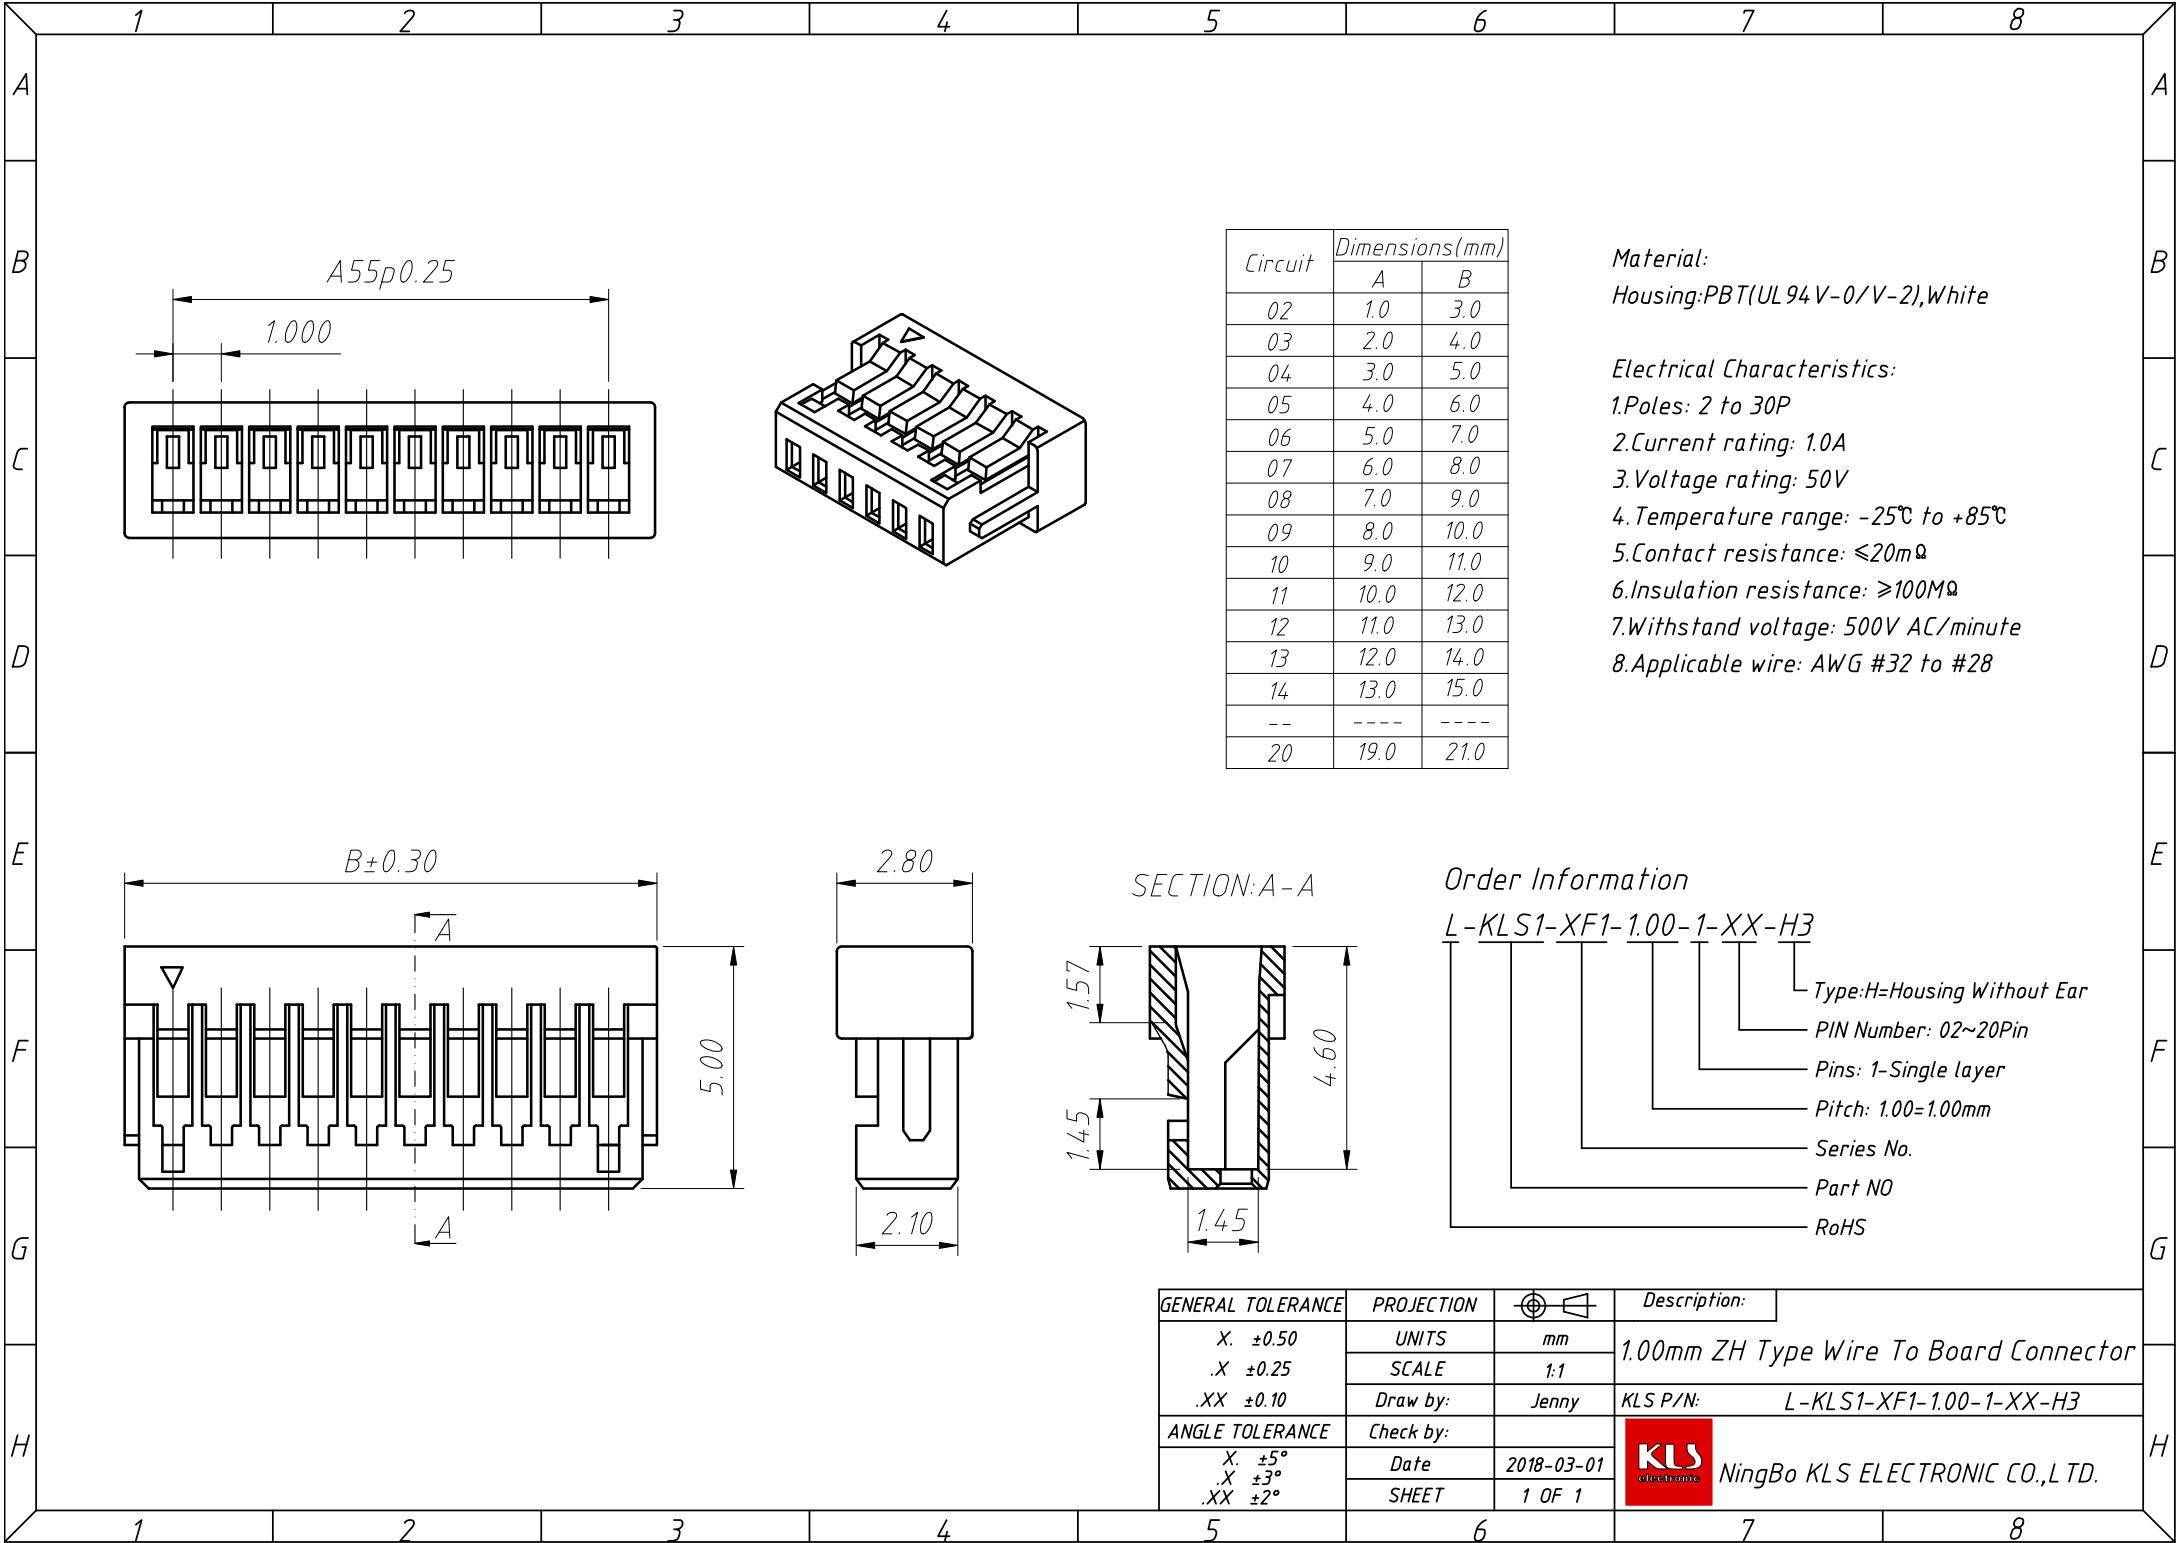

Circuit	Dimensions(mm)	
	A	B
02	1.0	3.0
03	2.0	4.0
04	3.0	5.0
05	4.0	6.0
06	5.0	7.0
07	6.0	8.0
08	7.0	9.0
09	8.0	10.0
10	9.0	11.0
11	10.0	12.0
12	11.0	13.0
13	12.0	14.0
14	13.0	15.0
--	----	----
20	19.0	21.0

Material:
Housing:PBT(UL 94V-0/V-2),White

Electrical Characteristics:

1.Poles: 2 to 30P
2.Current rating: 1.0A
3.Voltage rating: 50V
4.Temperature range: -25℃ to +85℃
5.Contact resistance: ≤20mΩ
6.Insulation resistance: ≥100MΩ
7.Withstand voltage: 500V AC/minute
8.Applicable wire: AWG #32 to #28

Order Information

L-KLS1-XF1-1.00-1-XX-H3

Type:H=Housing Without Ear
PIN Number: 02~20Pin
Pins: 1-Single layer
Pitch: 1.00=1.00mm
Series No.
Part NO
RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	1.00mm ZH Type Wire To Board Connector
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-XF1-1.00-1-XX-H3
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°			
.XX ±2°	SHEET	1 OF 1	