


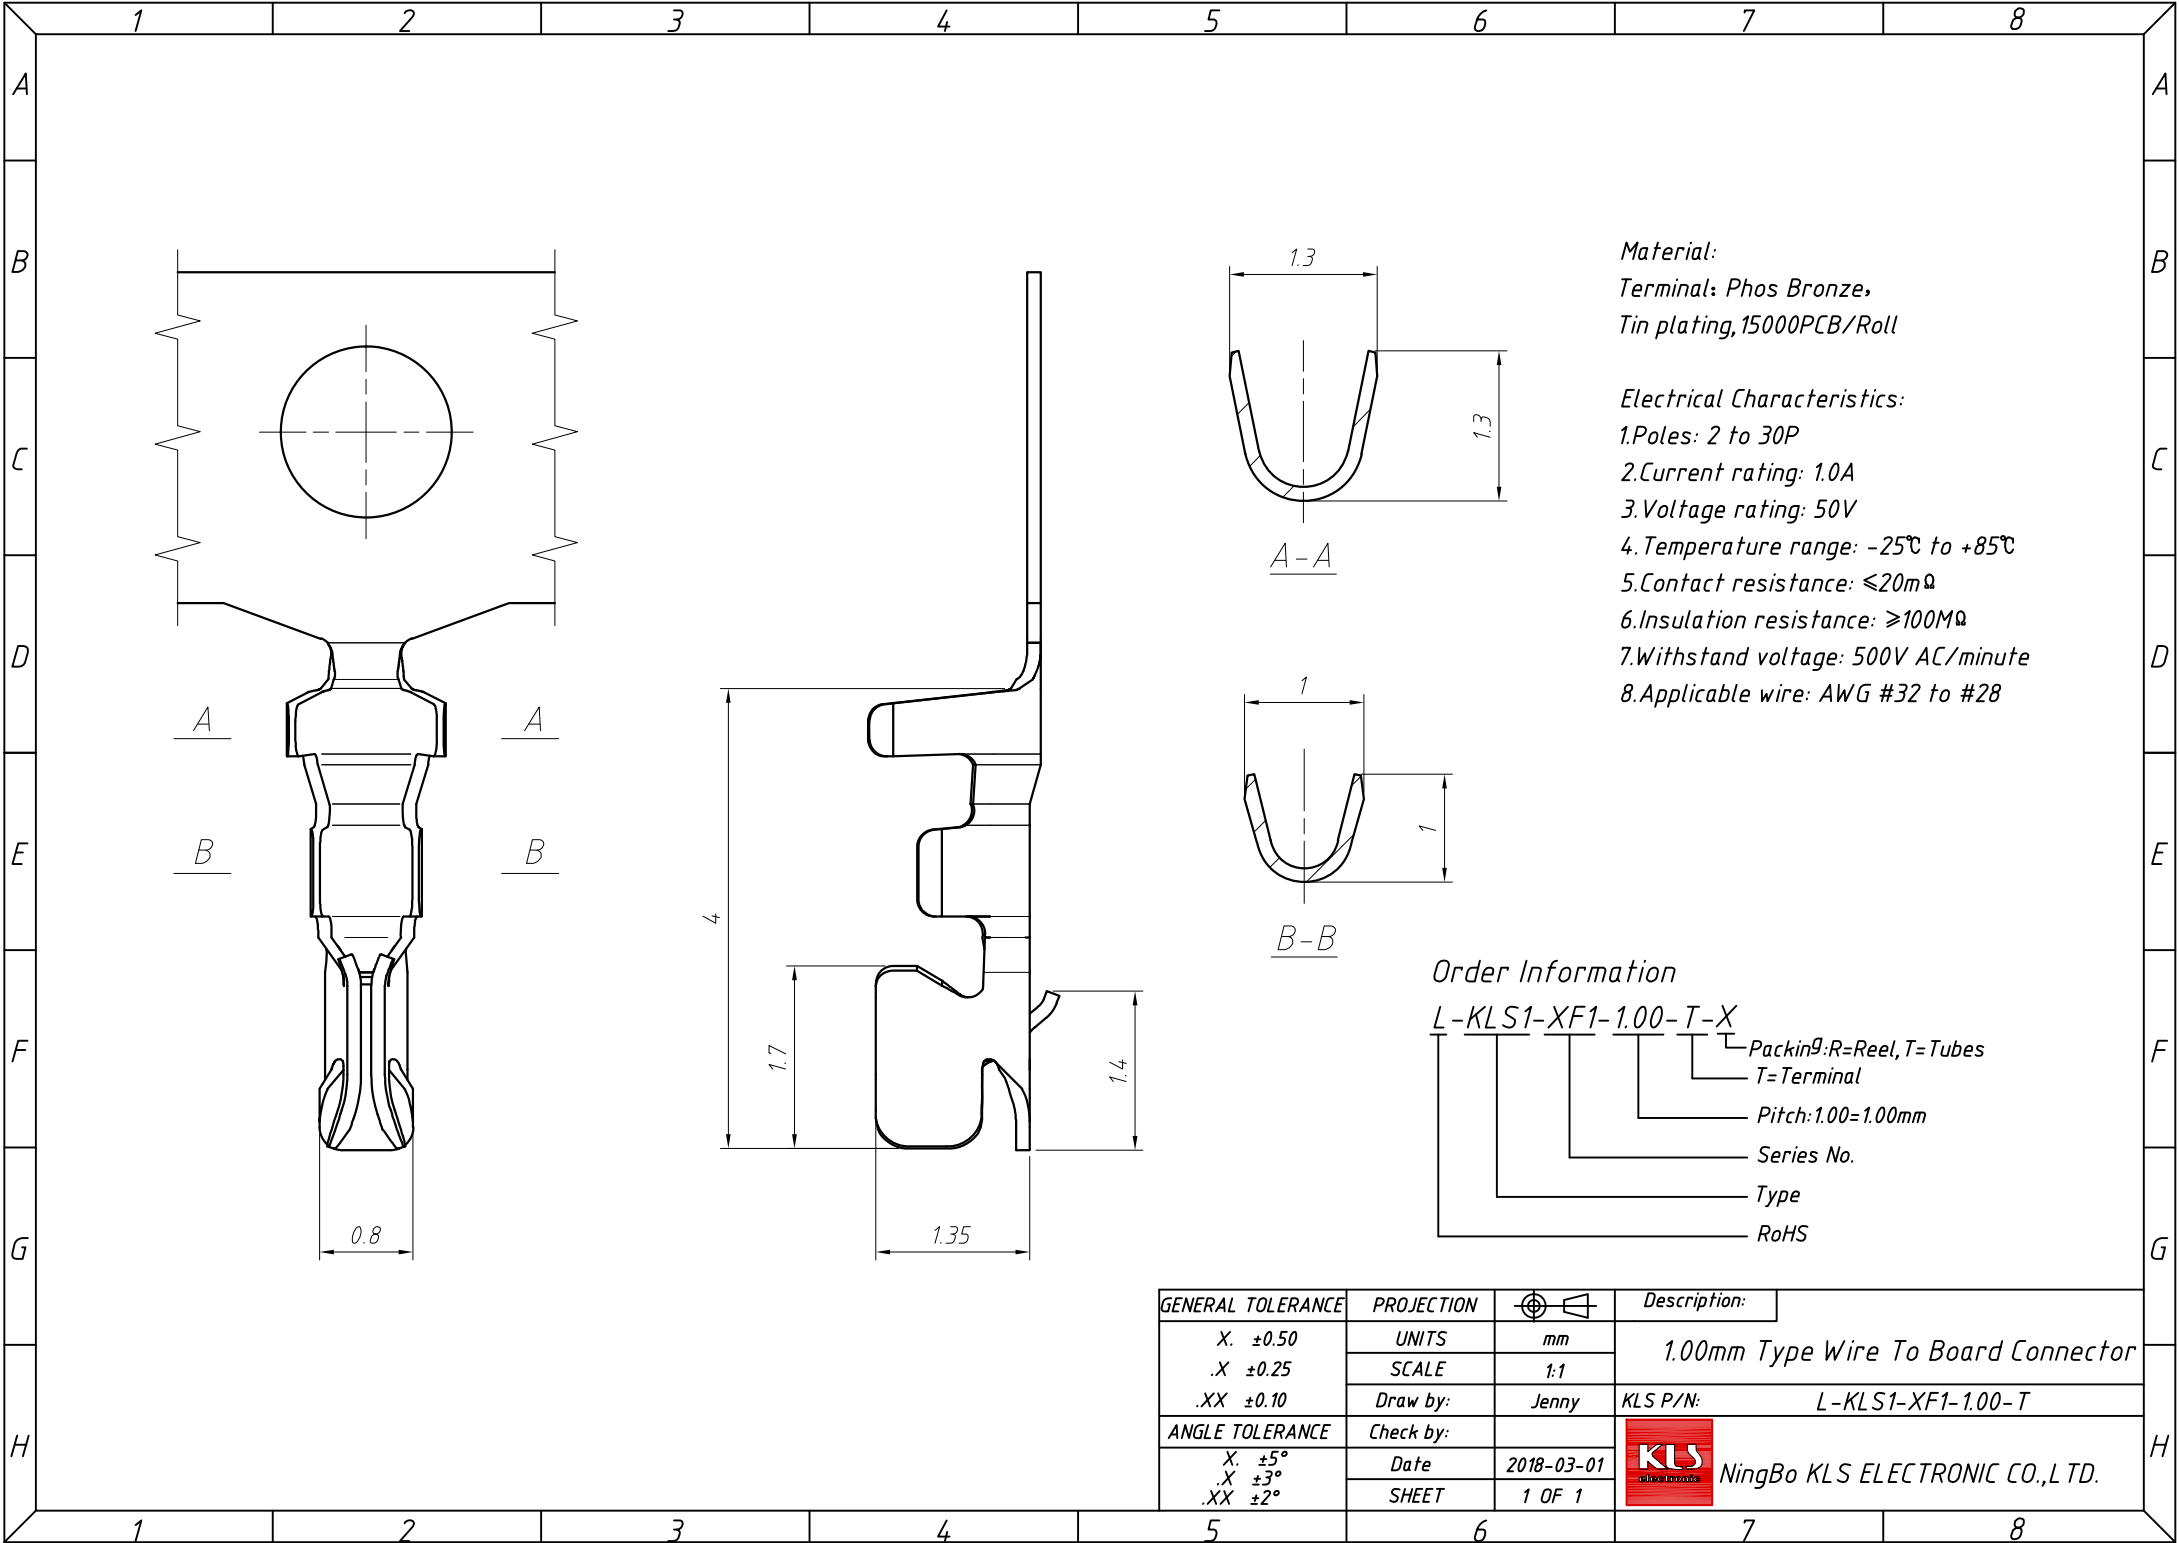

Material:
Terminal: Phos Bronze,
Tin plating,15000PCB/Roll

Electrical Characteristics:
1.Poles: 2 to 30P
2.Current rating: 1.0A
3.Voltage rating: 50V
4.Temperature range: -25℃ to +85℃
5.Contact resistance: ≤20mΩ
6.Insulation resistance: ≥100MΩ
7.Withstand voltage: 500V AC/minute
8.Applicable wire: AWG #32 to #28

Order Information
L-KLS1-XF1-1.00-T-X
Packin9:R=Reel,T=Tubes
T=Terminal
Pitch:1.00=1.00mm
Series No.
Type
RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	1.00mm Type Wire To Board Connector
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-XF1-1.00-T
X. ±5°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°			
.XX ±2°	SHEET	1 OF 1	