

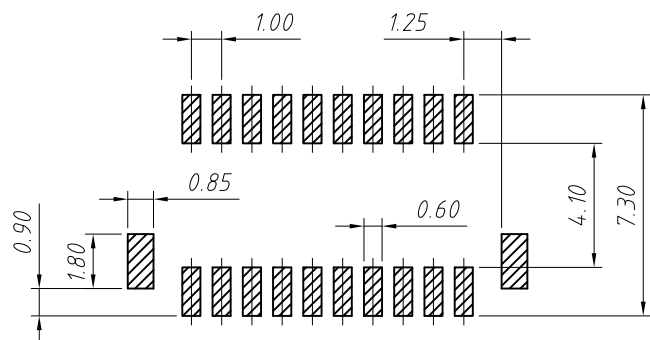



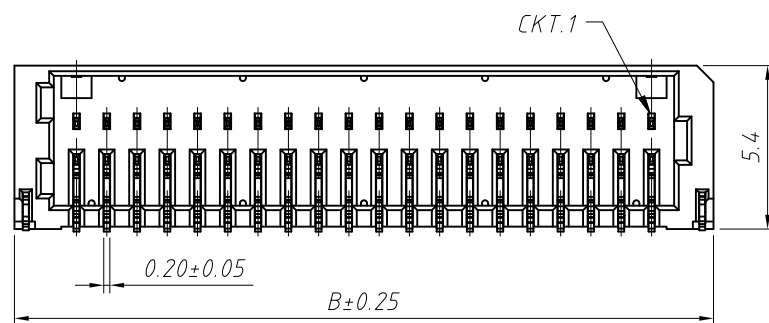

Recommend PCB Layout
All Tolerance: ± 0.1

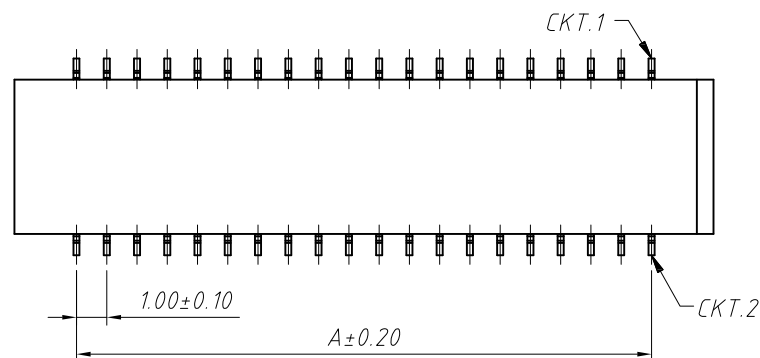


Material:
Insulator: PA6R UL 94V-0, Beige
Contacts: Copper alloy
Fitting nail: Copper alloy
Plating: Gold Plated

Electrical Specification:
Current rating: 1A AC DC
Voltage rating: 50V AC DC
Contact resistance: 20m Ω Max
Insulation resistance: 100M Ω Min
Withstanding Voltage: 500V AC/minute
Temperature range: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C

Part NO.	Dimensions	
	A	B
06P	5.00	9.10
08P	7.00	11.10
10P	9.00	13.10
15P	14.00	18.10
20P	19.00	23.10
25P	24.00	28.10

Order Information

L-KLS1-XF1-1.00-2-XX-RM-X
 L: Packin
 K: R=Reel, T= Tubes
 S: Male pin SMT Right Angle
 1: Pin NO: 06 ~ 25
 2: 2=Double layer
 1.00: Pitch: 1.00mm
 XX: Series
 RM: RoHS



GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	Pitch 1.00mm
.X ± 0.20	SCALE	1:1	Horizontal SMT Wafer, Double layer
.XX ± 0.10	Draw by:	Jenny	KLS P/N: L-KLS1-XF1-1.00-2-XX-RM
ANGLE TOLERANCE	Check by:		
X. $\pm 5^{\circ}$	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X $\pm 3^{\circ}$	SHEET	1 OF 1	
.XX $\pm 2^{\circ}$			