
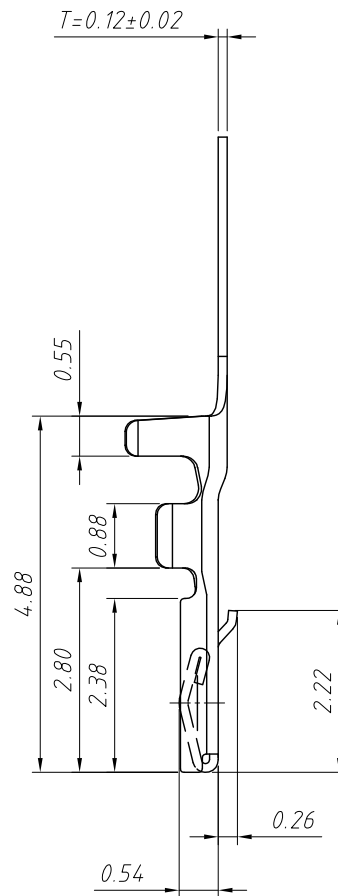


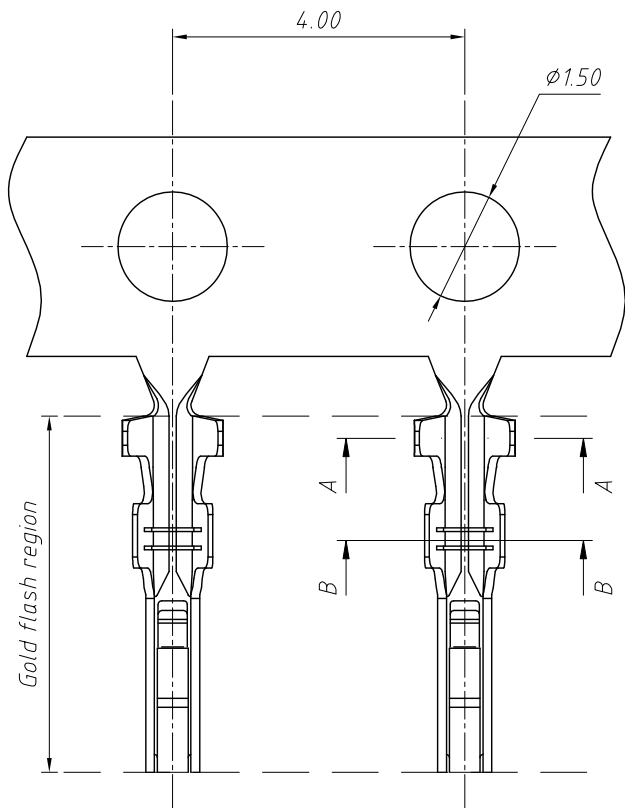


Material:
Terminal: Phosphor Bronze
Finish: Gold flash or matte
tin plated over Nickel
Applicable wires: AWG #28 ~ #32
Insulation O.D 0.4 to 0.8mm


Electrical Characteristics:
Current rating: 1.0A AC,DC
Voltage rating: 50V AC,DC
Temperature range: -40°C ~ +105°C
Insulation resistance: 500M Ω /Min.
Withstanding voltage: 300V AC/minute
Contact resistance: 55m Ω /Max.

Order Information:
L-KLS1-XF3-1.00-T


L: RoHS
1.00mm Pitch
Type: H-Hosing
H2-Hosing T-Terminal
VM-Vertical SMT Pin



SECTION A-A



SECTION B-B



ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				1.00mm Pitch SHL SHLD Type Wire to board connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XF3-1.00-T
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2020-11-11	
x.xxx	± 0.10	Check:	Daniel	2020-11-11	



NingBo KLS ELECTRONIC CO.,LTD.