
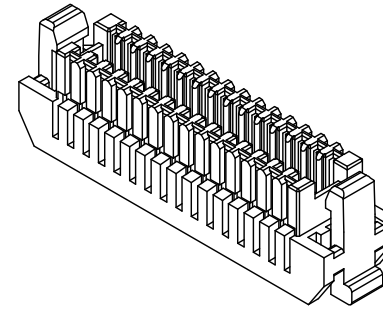


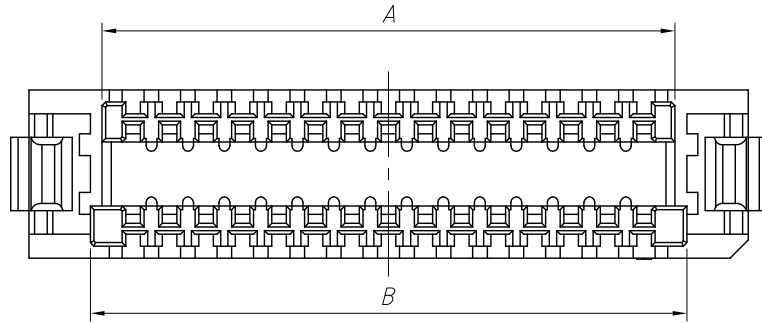

Material:

Housing: PA66 or LCP ,UL 94V-0,

Colour:Natural

Electrical Characteristics:

Current rating:1.0A AC,DC

Voltage rating:50V AC,DC

Temperature range:-45°C~+105°C

Insulationresistance:500M Ω /Min.

Withstanding voltage:300V AC/minute

Contact resistance:55m Ω /Max.

Order Information:

L - KLS1-XF3-1.00-XX-H

L: RoHS




1.00mm Pitch

XX-No.of 06~50pin

Type:H-Hosing

H2-Hosing T-Terminal

VM-Vertical SMT Pin

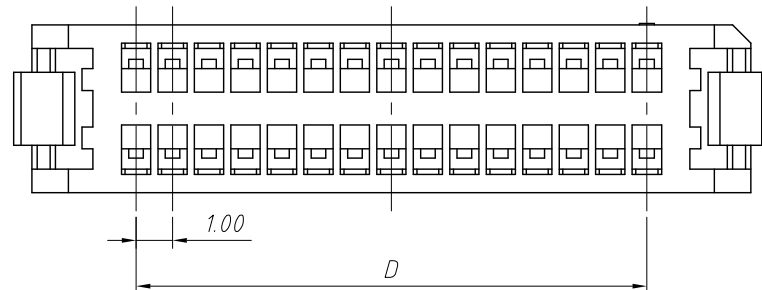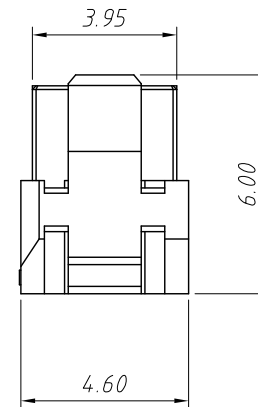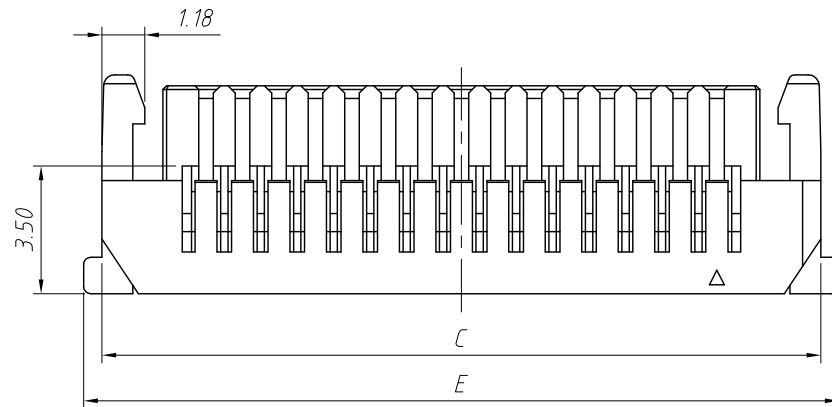

Circuit	Dimensions(mm)				
	A	B	C	D	E
2×3	3.70	4.35	7.70	2.00	8.70
2×5	5.70	6.35	9.70	4.00	10.70
2×6	6.70	7.35	10.70	5.00	11.70
2×10	10.70	11.35	14.70	9.00	15.70
2×15	15.70	16.35	19.70	14.00	20.70
2×20	20.70	21.35	24.70	19.00	25.70
2×25	25.70	26.35	29.70	24.00	30.70

ANGLE TOLERANCE	PROJECTION	Description:	1.00mm Pitch SHL SHLD Type	
$\pm 3^\circ$			Wire to board connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L - KLS1-XF3-1.00-XX-H
x.x ± 0.30	SHEET SIZE	A4		
x.xx ± 0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ± 0.10	Check:	Daniel	2020-11-11	