





1
RoHS Compliance






Material:
Housing: Nylon66 ,UL 94V-0,
Colour:Natural

Electrical Characteristics:
Current rating:1.0A AC,DC
Voltage rating:50V AC,DC
Temperature range:-45°C~+105°C
Insulationresistance:500M Ω /Min.
Withstanding voltage:300V AC/minute
Contact resistance:55m Ω /Max.

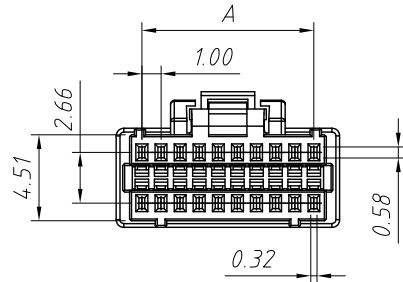

Order Information:
L-KLS1-XF3-1.00-XX-H2

L: RoHS
1.00mm Pitch
XX-No.of 06~50pin
Type:H-Hosing
H2-Hosing T-Terminal
VM-Vertical SMT Pin

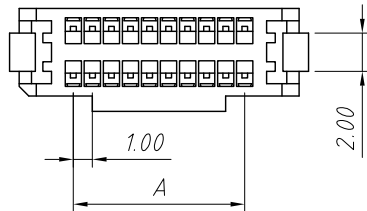

Circuit	Dimensions(mm)			
	A	B	C	D
20	9.00	11.30	14.70	15.70
30	14.00	16.30	19.70	20.70
40	19.00	21.30	24.70	25.70
50	24.00	26.30	29.70	30.70

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				1.00mm Pitch SHL SHLD Type Wire to board connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L - KLS1-XF3-1.00-XX-H2
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	± 0.10	Check:	Daniel	2020-11-11	