
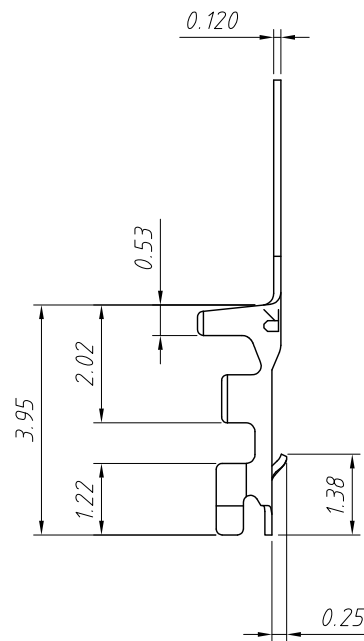

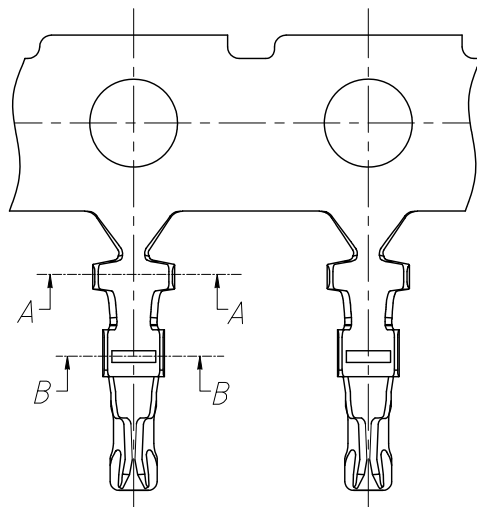


SEC:A-A



SEC:B-B

Material:

Terminal: Phosphor Bronze

Plating: Tin plated over Gold plated

Wire Range: AWG#28-#32

Electrical Characteristics:

Current rating: 1.0A AC,DC

Voltage rating: 50V AC,DC

Temperature range: -25°C ~ +85°C

Insulation resistance: 100MΩ/Min.

Withstanding voltage: 500V AC/minute

Contact resistance: 20mΩ/Max.

Order Information:

L-KLS1-XF4-1.00-T

L: RoHS

1.00mm Pitch

XX-No. of 02~20pin

Type: H-Hosing

H2-Hosing T-Terminal

VM-Vertical SMT Pin

RM-Horizontal SMT Pin

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			1.00mm pitch Crimp Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XF4-1.00-T
x.x ±0.30	SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,LTD.	
x.xx ±0.20	Draw:	Daniel		
x.xxx ±0.10	Check:	Daniel		