

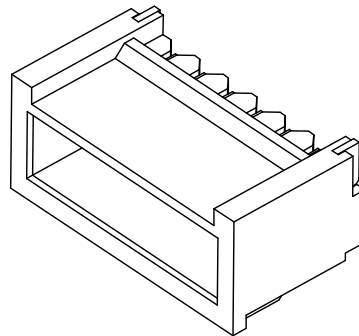
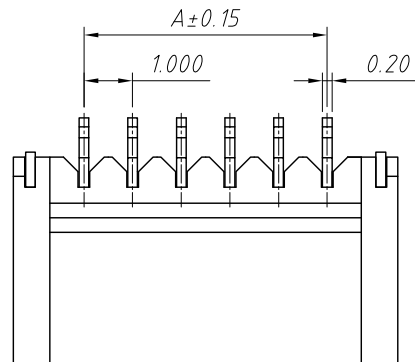


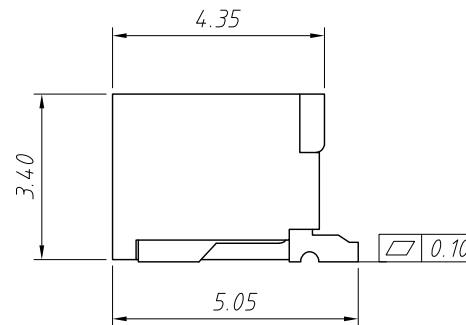


Material:
Housing:PA9T,UL 94V-0,
Colour:Natural
Contact : Phosphor Bronze
Plating: Matte Tin plated over Nickel

Electrical Characteristics:
Current rating:1.0A AC,DC
Voltage rating:125V AC,DC
Temperature range:-25°C~+85°C
Insulationresistance:100MΩ/Min.
Withstanding voltage:500V AC/minute
Contact resistance:20mΩ/Max.

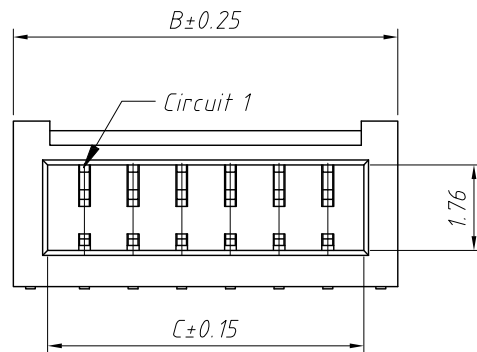

Pins	Dimensions(mm)		
	A	B	C
02	1.00	3.90	2.50
03	2.00	4.90	3.50
04	3.00	5.90	4.50
05	4.00	6.90	5.50
06	5.00	7.90	6.50
07	6.00	8.90	7.50
08	7.00	9.90	8.50
09	8.00	10.90	9.50
10	9.00	11.90	10.50
11	10.00	12.90	11.50
12	11.00	13.90	12.50
13	12.00	14.90	13.50
14	13.00	15.90	14.50
15	14.00	16.90	15.50
16	15.00	17.90	16.50
17	16.00	18.90	17.50
18	17.00	19.90	18.50
19	18.00	20.90	19.50
20	19.00	21.90	20.50

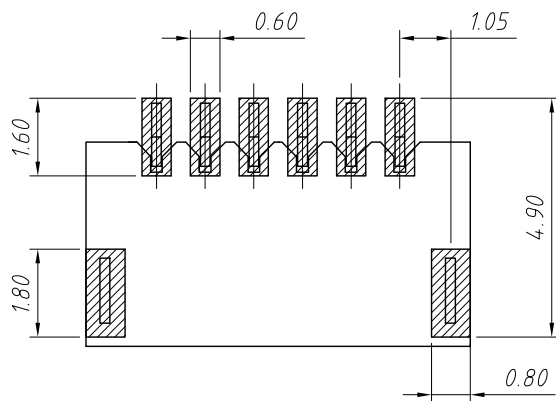

Recommended PCB Layout
General Tolerance±0.05

Order Information:

L-KLS1-XF4-1.00-XX-RM

L: RoHS

1.00mm Pitch

XX-No.of 02~20pin

Type:H-Hosing

H2-Hosing T-Terminal

VM-Vertical SMT Pin RM-Horizontal SMT Pin

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				1.00mm Pitch wire to board connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XF4-1.00-XX-RM
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2020-11-11	