

TERMINAL BLOCK Connector



Pluggable Series

KLS2-EDKF-3.81 Series Pitch=3.81mm

Electrical :




Rated voltage: 300V
 Rated current: 8A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC2000V/1Min

Material

Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: +250°C for 5 Sec

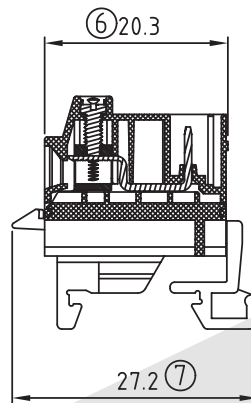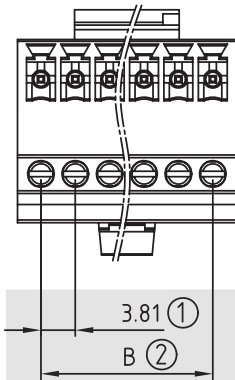

ORDER INFORMATION

Product NO.: KLS2-EDKF-3.81-XXP X X X

Pos. NO.	_____	Customer Request
Series No.	_____	Screw: C=Cross Screw S=Slot Screw
Pitch: 3.81=3.81mm	_____	Color: 1=Gray 2=Blue 3=Black
Number of Pole	_____	4=Green 5=Orange 6=Red
		7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information