

BUZZER

Mechanical Buzzer Series


KLS3-MB-2315R 23*17*15mm Mechanical Buzzer Series

SPECIFICATIONS


Rated Voltage	3VDC
Operating Voltage	2-4VDC
Max. Rated Current	25mA
Min. S.P.L. (@ 20cm)	75dB
Resonant Frequency	400 ± 100Hz
Operating Temp	-20 ~ +60 ° C
Weight	10g



Dimensions (Unit:mm)

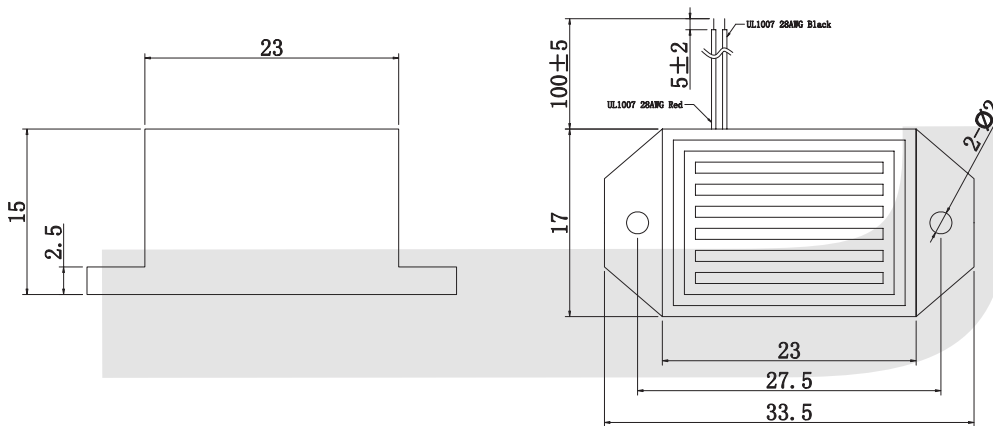

Order Code	Rated Voltage	Min.S.P.L.(@20cm)
KLS3-MB-2315R-A	1.5VDC	70dB
KLS3-MB-2315R-B	3VDC	75dB
KLS3-MB-2315R-C	6VDC	75dB
KLS3-MB-2315R-D	9VDC	75dB
KLS3-MB-2315R-E	12VDC	75dB
KLS3-MB-2315R-F	24VDC	75dB

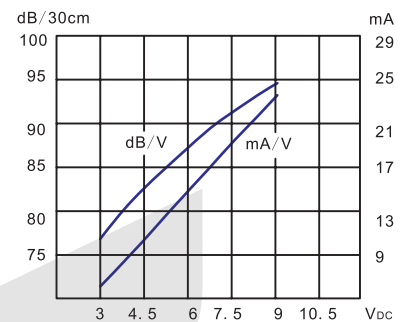

ORDER INFORMATION

Product NO.: KLS3-MB-2315R A

