
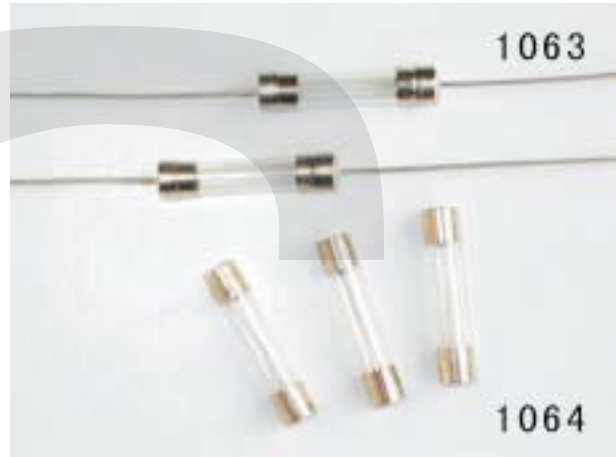


FUSE AND FUSE HOLDER

Φ6.35x25 Glass Tube Fuse Series

KLS5-1063/1064 Φ6.35x25 Glass Tube Fuse (Fast Blow) Series

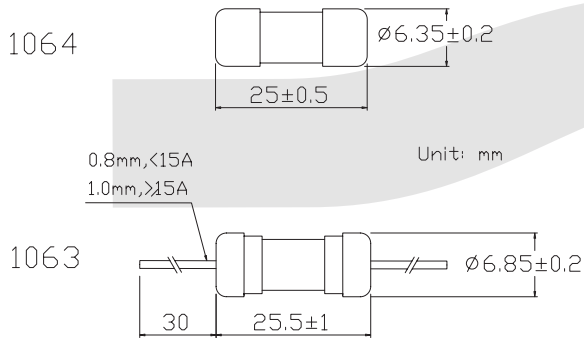


ELECTRICAL CHARACTERISTICS

Rating	2.1 In		2.75 In		4 In		10 In
	Max	Min	Max	Min	Max	Max	
≥50mA~100mA	20s	20ms	200ms	1ms	30ms	5ms	
>100mA~10A	20s	20ms	1500ms	8ms	400ms	80ms	

Product Model	Rated Current	Rated Volts	Product Model	Rated Current	Rated Volts
1064-0100	100mA	125V/250V	1063-0100	100mA	125V/250V
1064-0125	125mA	125V/250V	1063-0125	125mA	125V/250V
1064-0150	150mA	125V/250V	1063-0150	150mA	125V/250V
1064-0160	160mA	125V/250V	1063-0160	160mA	125V/250V
1064-0200	200mA	125V/250V	1063-0200	200mA	125V/250V
1064-0250	250mA	125V/250V	1063-0250	250mA	125V/250V
1064-0300	300mA	125V/250V	1063-0300	300mA	125V/250V
1064-0315	315mA	125V/250V	1063-0315	315mA	125V/250V
1064-0350	350mA	125V/250V	1063-0350	350mA	125V/250V
1064-0400	40mA	125V/250V	1063-0400	40mA	125V/250V
1064-0500	500mA	125V/250V	1063-0500	500mA	125V/250V
1064-0600	600mA	125V/250V	1063-0600	600mA	125V/250V
1064-0700	700mA	125V/250V	1063-0700	700mA	125V/250V
1064-0750	750mA	125V/250V	1063-0750	750mA	125V/250V
1064-0800	800mA	125V/250V	1063-0800	800mA	125V/250V
1064-1000	1A	125V/250V	1063-1000	1A	125V/250V
1064-1200	1.2	125V/250V	1063-1200	1.2	125V/250V
1064-1250	1.25A	125V/250V	1063-1250	1.25A	125V/250V
1064-1500	1.5A	125V/250V	1063-1500	1.5A	125V/250V
1064-1600	1.6A	125V/250V	1063-1600	1.6A	125V/250V
1064-1800	1.8A	125V/250V	1063-1800	1.8A	125V/250V
1064-2000	2A	125V/250V	1063-2000	2A	125V/250V
1064-2500	2.5A	125V/250V	1063-2500	2.5A	125V/250V
1064-3000	3A	125V/250V	1063-3000	3A	125V/250V
1064-3150	3.15A	125V/250V	1063-3150	3.15A	125V/250V
1064-3500	3.5	125V/250V	1063-3500	3.5	125V/250V
1064-4000	4A	125V/250V	1063-4000	4A	125V/250V
1064-5000	5A	125V/250V	1063-5000	5A	125V/250V
1064-6000	6A	125V/250V	1063-6000	6A	125V/250V
1064-6300	6.3A	125V/250V	1063-6300	6.3A	125V/250V
1064-7000	7A	125V/250V	1063-7000	7A	125V/250V
1064-8000	8A	125V/250V	1063-8000	8A	125V/250V
1064-10000	10A	125V/250V	1063-10000	10A	125V/250V
1064-12000	12A	125V/250V	1063-12000	12A	125V/250V
1064-15000	15A	125V/250V	1063-15000	15A	125V/250V
1064-20000	20A	125V/250V	1063-20000	20A	125V/250V
1064-25000	25A	125V/250V	1063-25000	25A	125V/250V
1064-30000	30A	125V/250V	1063-30000	30A	125V/250V

I-T CHARACTERISTICS CURVE
电流-时间曲线图

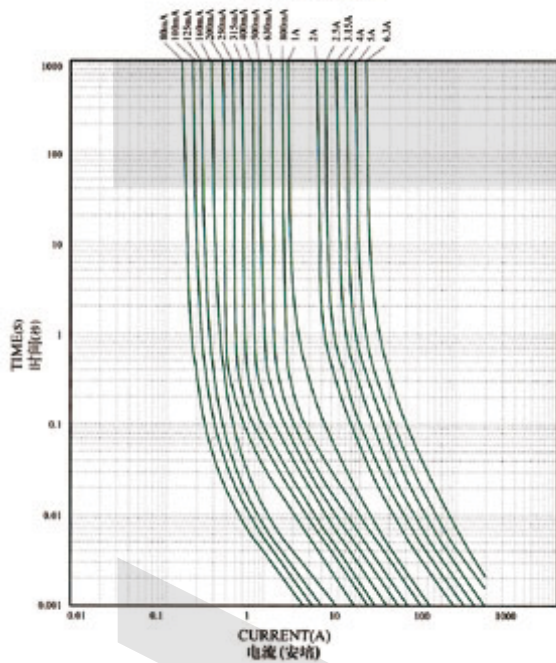

ORDER INFORMATION

Product NO.: KLS5-1063-XXXX

Rated Current
Lead Type: 1063=With Lead 1064=No Lead
Part Number