


FUSE AND FUSE HOLDER

Φ6.35x32(30) Glass Tube Fuse Series


KLS5-1049/1050 Φ6.35x32 Glass Tube Fuse (Slow Blow) Series

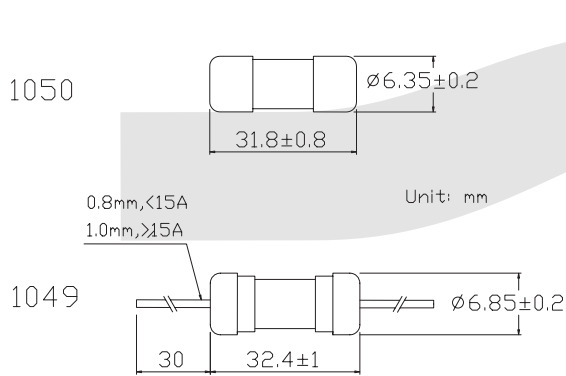

ELECTRICAL CHARACTERISTICS

Rating	Blowing TIME
100%	4 hour Min
135%	1 hour Max
200%	5 sec Max

Product Model	Rated Current	Rated Volts	Product Model	Rated Current	Rated Volts
1050-0100	100mA	125V/250V	1049-0100	100mA	125V/250V
1050-0125	125mA	125V/250V	1049-0125	125mA	125V/250V
1050-0150	150mA	125V/250V	1049-0150	150mA	125V/250V
1050-0160	160mA	125V/250V	1049-0160	160mA	125V/250V
1050-0200	200mA	125V/250V	1049-0200	200mA	125V/250V
1050-0250	250mA	125V/250V	1049-0250	250mA	125V/250V
1050-0300	300mA	125V/250V	1049-0300	300mA	125V/250V
1050-0315	315mA	125V/250V	1049-0315	315mA	125V/250V
1050-0350	350mA	125V/250V	1049-0350	350mA	125V/250V
1050-0400	40mA	125V/250V	1049-0400	40mA	125V/250V
1050-0500	500mA	125V/250V	1049-0500	500mA	125V/250V
1050-0600	600mA	125V/250V	1049-0600	600mA	125V/250V
1050-0700	700mA	125V/250V	1049-0700	700mA	125V/250V
1050-0750	750mA	125V/250V	1049-0750	750mA	125V/250V
1050-0800	800mA	125V/250V	1049-0800	800mA	125V/250V
1050-1000	1A	125V/250V	1049-1000	1A	125V/250V
1050-1200	1.2	125V/250V	1049-1200	1.2	125V/250V
1050-1250	1.25A	125V/250V	1049-1250	1.25A	125V/250V
1050-1500	1.5A	125V/250V	1049-1500	1.5A	125V/250V
1050-1600	1.6A	125V/250V	1049-1600	1.6A	125V/250V
1050-1800	1.8A	125V/250V	1049-1800	1.8A	125V/250V
1050-2000	2A	125V/250V	1049-2000	2A	125V/250V
1050-2500	2.5A	125V/250V	1049-2500	2.5A	125V/250V
1050-3000	3A	125V/250V	1049-3000	3A	125V/250V
1050-3150	3.15A	125V/250V	1049-3150	3.15A	125V/250V
1050-3500	3.5	125V/250V	1049-3500	3.5	125V/250V
1050-4000	4A	125V/250V	1049-4000	4A	125V/250V
1050-5000	5A	125V/250V	1049-5000	5A	125V/250V
1050-6000	6A	125V/250V	1049-6000	6A	125V/250V
1050-6300	6.3A	125V/250V	1049-6300	6.3A	125V/250V
1050-7000	7A	125V/250V	1049-7000	7A	125V/250V
1050-8000	8A	125V/250V	1049-8000	8A	125V/250V
1050-10000	10A	125V/250V	1049-10000	10A	125V/250V
1050-12000	12A	125V/250V	1049-12000	12A	125V/250V
1050-15000	15A	125V/250V	1049-15000	15A	125V/250V
1050-20000	20A	125V/250V	1049-20000	20A	125V/250V
1050-25000	25A	125V/250V	1049-25000	25A	125V/250V
1050-30000	30A	125V/250V	1049-30000	30A	125V/250V

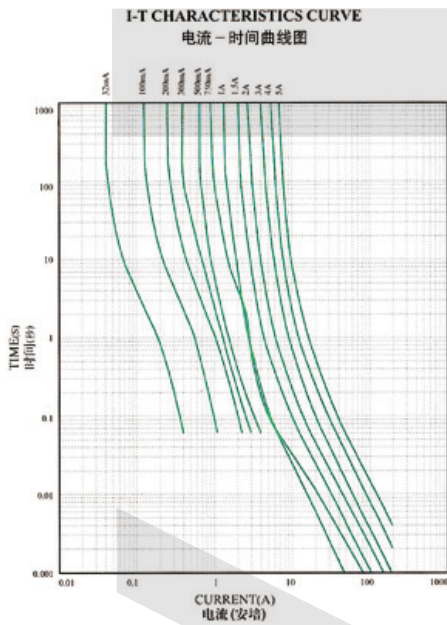

ORDER INFORMATION

Product NO.: KLS5-1049-XXXX

Rated Current
Lead Type: 1049=With Lead 1050=No Lead
Part Number