
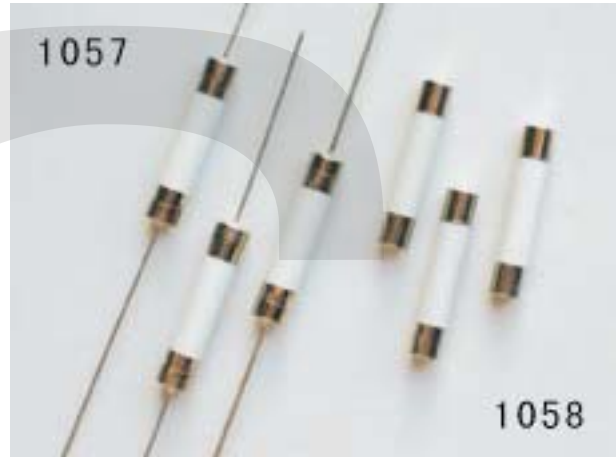


FUSE AND FUSE HOLDER

Φ6.35x32(30) Ceramic Tube Fuse Series

KLS5-1057/1058 Φ6.35x32(30) Ceramic Tube Fuse (Slow Blow) Series

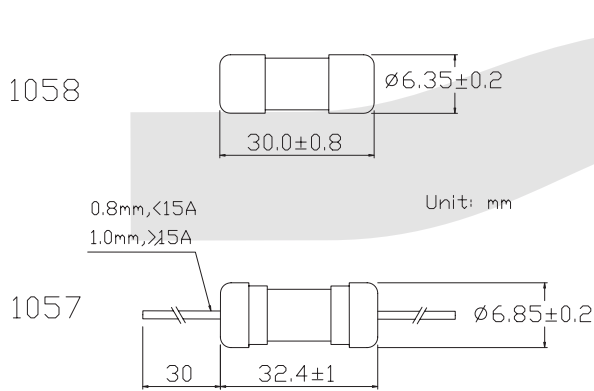


ELECTRICAL CHARACTERISTICS

| Rating | Blowing TIME |
|--------|--------------|
| 100% | 4 hour Min |
| 135% | 1 hour Max |
| 200% | 5s ~ 120s |

| Product Model | Rated Current | Rated Volts | Product Model | Rated Current | Rated Volts |
|---------------|---------------|-------------|---------------|---------------|-------------|
| 1058-0100 | 100mA | 125V/250V | 1057-0100 | 100mA | 125V/250V |
| 1058-0125 | 125mA | 125V/250V | 1057-0125 | 125mA | 125V/250V |
| 1058-0150 | 150mA | 125V/250V | 1057-0150 | 150mA | 125V/250V |
| 1058-0160 | 160mA | 125V/250V | 1057-0160 | 160mA | 125V/250V |
| 1058-0200 | 200mA | 125V/250V | 1057-0200 | 200mA | 125V/250V |
| 1058-0250 | 250mA | 125V/250V | 1057-0250 | 250mA | 125V/250V |
| 1058-0300 | 300mA | 125V/250V | 1057-0300 | 300mA | 125V/250V |
| 1058-0315 | 315mA | 125V/250V | 1057-0315 | 315mA | 125V/250V |
| 1058-0350 | 350mA | 125V/250V | 1057-0350 | 350mA | 125V/250V |
| 1058-0400 | 40mA | 125V/250V | 1057-0400 | 40mA | 125V/250V |
| 1058-0500 | 500mA | 125V/250V | 1057-0500 | 500mA | 125V/250V |
| 1058-0600 | 600mA | 125V/250V | 1057-0600 | 600mA | 125V/250V |
| 1058-0700 | 700mA | 125V/250V | 1057-0700 | 700mA | 125V/250V |
| 1058-0750 | 750mA | 125V/250V | 1057-0750 | 750mA | 125V/250V |
| 1058-0800 | 800mA | 125V/250V | 1057-0800 | 800mA | 125V/250V |
| 1058-1000 | 1A | 125V/250V | 1057-1000 | 1A | 125V/250V |
| 1058-1200 | 1.2 | 125V/250V | 1057-1200 | 1.2 | 125V/250V |
| 1058-1250 | 1.25A | 125V/250V | 1057-1250 | 1.25A | 125V/250V |
| 1058-1500 | 1.5A | 125V/250V | 1057-1500 | 1.5A | 125V/250V |
| 1058-1600 | 1.6A | 125V/250V | 1057-1600 | 1.6A | 125V/250V |
| 1058-1800 | 1.8A | 125V/250V | 1057-1800 | 1.8A | 125V/250V |
| 1058-2000 | 2A | 125V/250V | 1057-2000 | 2A | 125V/250V |
| 1058-2500 | 2.5A | 125V/250V | 1057-2500 | 2.5A | 125V/250V |
| 1058-3000 | 3A | 125V/250V | 1057-3000 | 3A | 125V/250V |
| 1058-3150 | 3.15A | 125V/250V | 1057-3150 | 3.15A | 125V/250V |
| 1058-3500 | 3.5 | 125V/250V | 1057-3500 | 3.5 | 125V/250V |
| 1058-4000 | 4A | 125V/250V | 1057-4000 | 4A | 125V/250V |
| 1058-5000 | 5A | 125V/250V | 1057-5000 | 5A | 125V/250V |
| 1058-6000 | 6A | 125V/250V | 1057-6000 | 6A | 125V/250V |
| 1058-6300 | 6.3A | 125V/250V | 1057-6300 | 6.3A | 125V/250V |
| 1058-7000 | 7A | 125V/250V | 1057-7000 | 7A | 125V/250V |
| 1058-8000 | 8A | 125V/250V | 1057-8000 | 8A | 125V/250V |
| 1058-10000 | 10A | 125V/250V | 1057-10000 | 10A | 125V/250V |
| 1058-12000 | 12A | 125V/250V | 1057-12000 | 12A | 125V/250V |
| 1058-15000 | 15A | 125V/250V | 1057-15000 | 15A | 125V/250V |
| 1058-20000 | 20A | 125V/250V | 1057-20000 | 20A | 125V/250V |
| 1058-25000 | 25A | 125V/250V | 1057-25000 | 25A | 125V/250V |
| 1058-30000 | 30A | 125V/250V | 1057-30000 | 30A | 125V/250V |

I-T CHARACTERISTICS CURVE
电流 - 时间曲线图

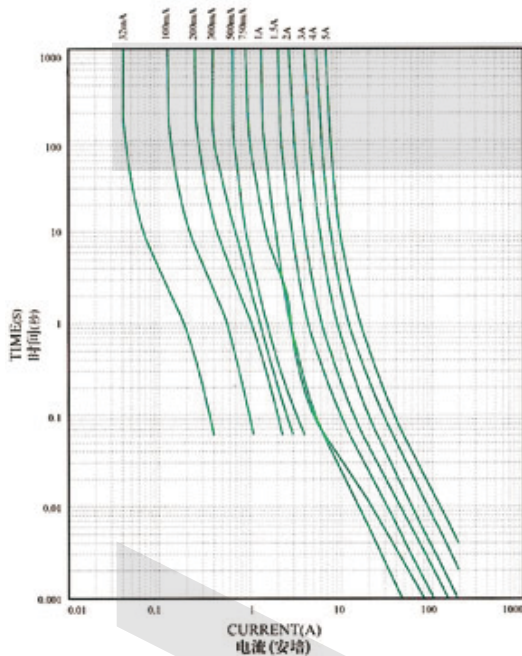

ORDER INFORMATION

Product NO.: **KLS5-1057-XXXX**

Rated Current
Lead Type: 1057=With Lead 1058=No Lead
Part Number