


Terminals Series

KLS8-0604 Screw Press Line Cap Series

Temperature Rating: 105°C
 Maximum Electrical Rating: 300 VOLTS
 APPROVED: UL CSA
 Material: UL Nylon 66, with spring inside.
 Usage: peel wire coat, insert the wire in, then tighten.

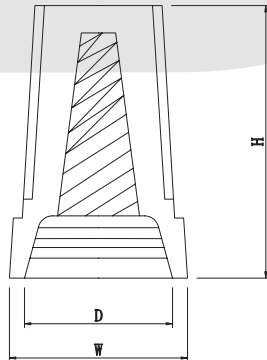

VIII

ITEM NO.	SUITABLE	DIMENSION inch (mm)			COLOR	Q' TY
	WIRE	H	W	D		BOX
	NO. & A. W. G.					
WN1	MIN #20X1+#22X1	0.598	0.339	0.264	GREY	1000
	MAX #16X2	15.2	8.6	6.7	ORANGE	
WN2	MIN #20X3	0.693	0.386	0.291	BLUE	1000
	MAX #16X3	17.6	9.8	7.4	ORANGE	
WN3	MIN #20X3	0.866	0.472	0.39	ORANGE	500
	MAX #16X3+#18X1	22	12	9.9	YELLOW	
WN4	MIN #14X1+#18X1	0.965	0.551	0.433	YELLOW	500
	MAX #14X4+#18X1	24.5	14	11	ORANGE, RED	
WN6	MIN #14X2	1.079	0.661	0.5	RED	250
	MAX #10X2+#12X2	27.4	16.8	12.7		
WN8	MIN #12X3	1.286	0.72	0.504	GREY	200
	MAX #10X4	32.2	18.3	12.8		

ORDER INFORMATION

KLS8-0604 - WN1

