

Stereo Jack Series


KLS1-SSJ2.5-001 (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal10 : Brass
 Housing : Pa66

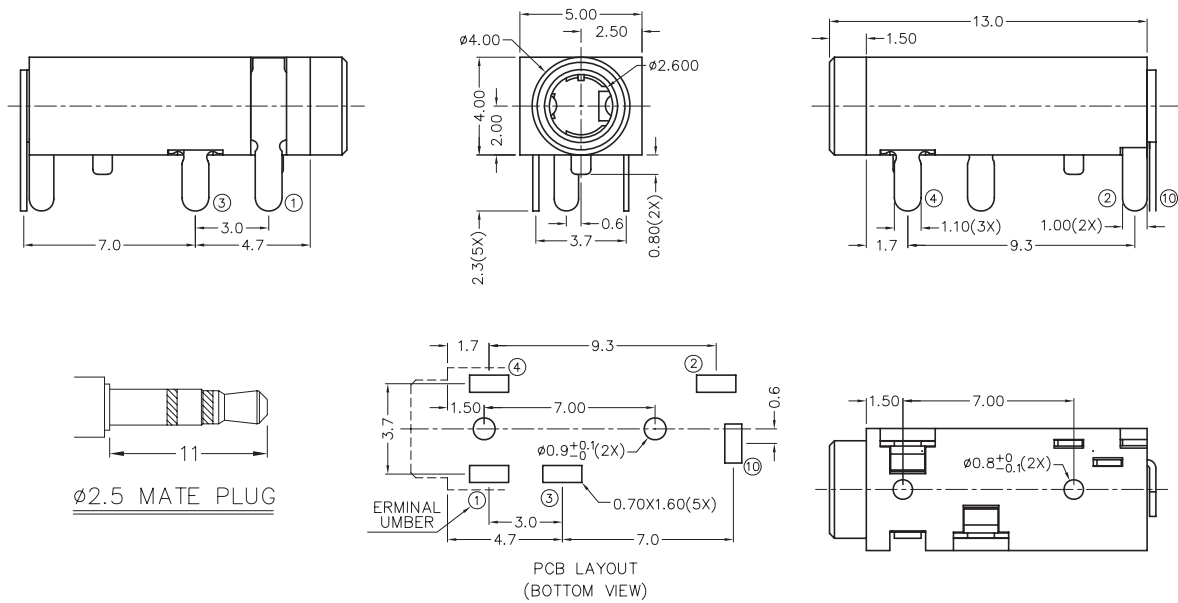

MODEL NO.	SSJ2. 5-001	SSJ2. 5-001A	SSJ2. 5-001B
SCHEMATIC			

ORDER INFORMATION

Product NO.: **KLS1-SSJ2.5 -001A**

Pos. NO. _____ Schmatic: See Annex
 _____ 2.5mm Dip Stereo Jack Type