

Stereo Jack Series


KLS1-TSJ3.5-002B (Dip Stereo Jack)

Technical parameters:

- Rated voltage: DC 30 V
- Rated current: 0.5 A
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 N
- Life: 50000 times
- Operating Temperature:-30°C ~ 70°C

Material:

- Housing -A/B/INSULATOR/PIN BOARD: PA66
- Contact Clip: C5210r-EH AG CLAD
- Center Pin Material:
 - Terminal 1,2,3: Copper Alloy
 - Terminal 4,5,6,10,11: Brass

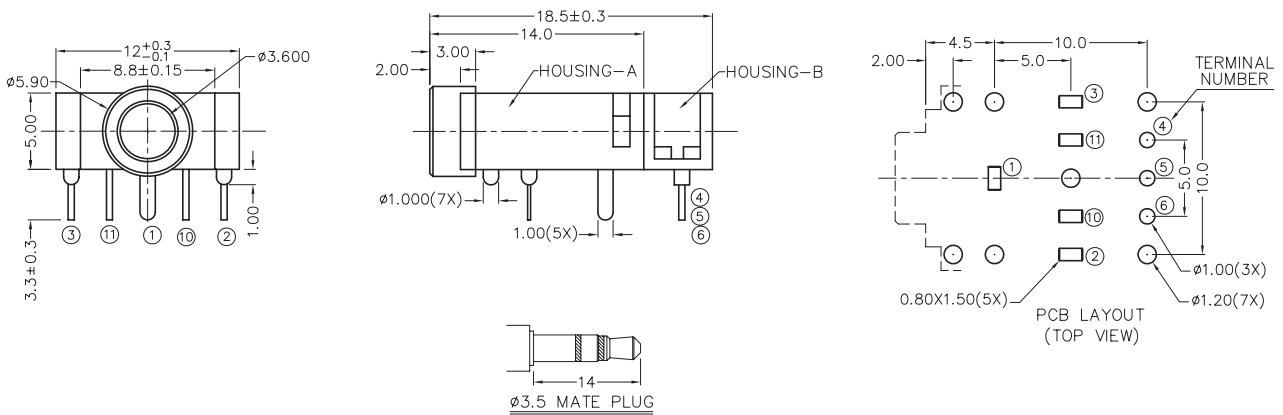

MODEL NO.	TSJ-3.5-002B	TSJ-3.5-002BA	TSJ-3.5-002BB	TSJ-3.5-002BC	TSJ-3.5-002BD	TSJ-3.5-002BE
SCHEMATIC						

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-002BA

