

RCA JACK Series





KLS1-RCA-602 R/A PCB Mount 2X3 RCA Jack

Electrical Specification:

Contact resistance : 30mΩ Max
Insulation resistance : 50MΩ Min at DC 500V
Withstand voltage : AC 500V(50Hz) 1min
Operating Temperature : -25°C~+85°C

Materials:

Sealed Plate : Steel
Terminal : Brass
Outer Contact : Brass
Washer : PBT UL94V~0
Housing : PBT UL94V~0

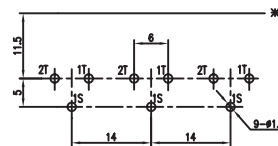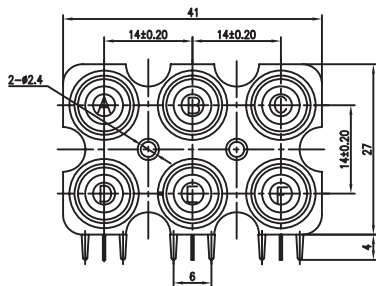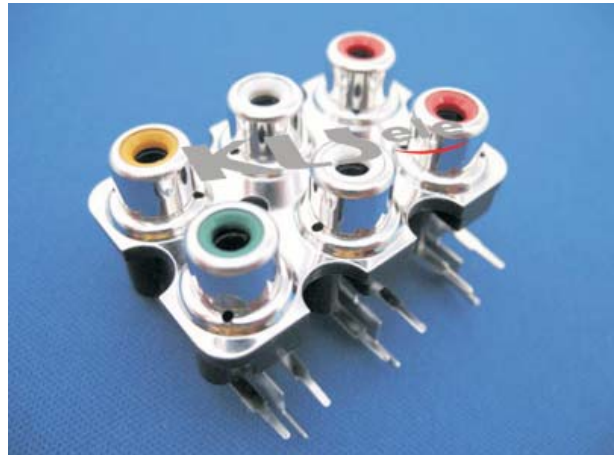

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MODEL NO.	RCA-602
SCHEMATIC	

ORDER INFORMATION

Product NO.: KLS1-RCA-602-N-YE-WH-RE-GR-WH-RE

Pos. NO. _____
RCA Jack Type _____
G:Nickel Plated _____
Color : YE-WH-RE-GR-WH-RE :
Yellow-White-Red-Green-White-Red