

XLR CONNECTOR SERIES

KLS1-XLR-S14 (XLR Socket)

Electrical Specification:


Contact resistance: $\leq 0.03\Omega$ Insulation resistance: $\geq 100 \text{m}\Omega$


Withstand voltage: 500V AC (50Hz)/minute

Rated load: 50V DC, 1A

Insertion and extraction force: 4-40N Temperature range: -30°C~+80°C



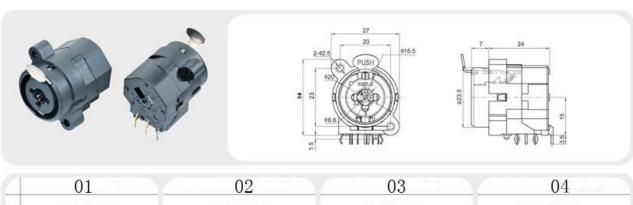

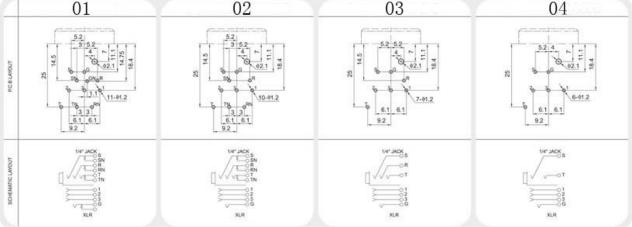

ORDER INFORMATION

Product NO.:KLS1-XLR-S14-01

XLR Jack series — 01, 02, 03 Use this chart to