


XLR CONNECTOR SERIES

KLS1-XLR-P02 (XLR Plug)

Electrical Specification:

Number of contacts: 3
Contact Resistance: ≤ 3 mOhms
Insulation Resistance Initial: > 2 GOhms
After Damp Heat Test: > 1 GOhms
Dielectric Strength: 1500 V dc
Rated current: 16 A
Mechanical Lifetime: > 1000 cycles
Insertion / Withdrawal Force: ≤ 20 N
Cable O.D. Range: 4.0 mm - 8.0 mm
Temperature Range: -30°C to $+80^{\circ}\text{C}$

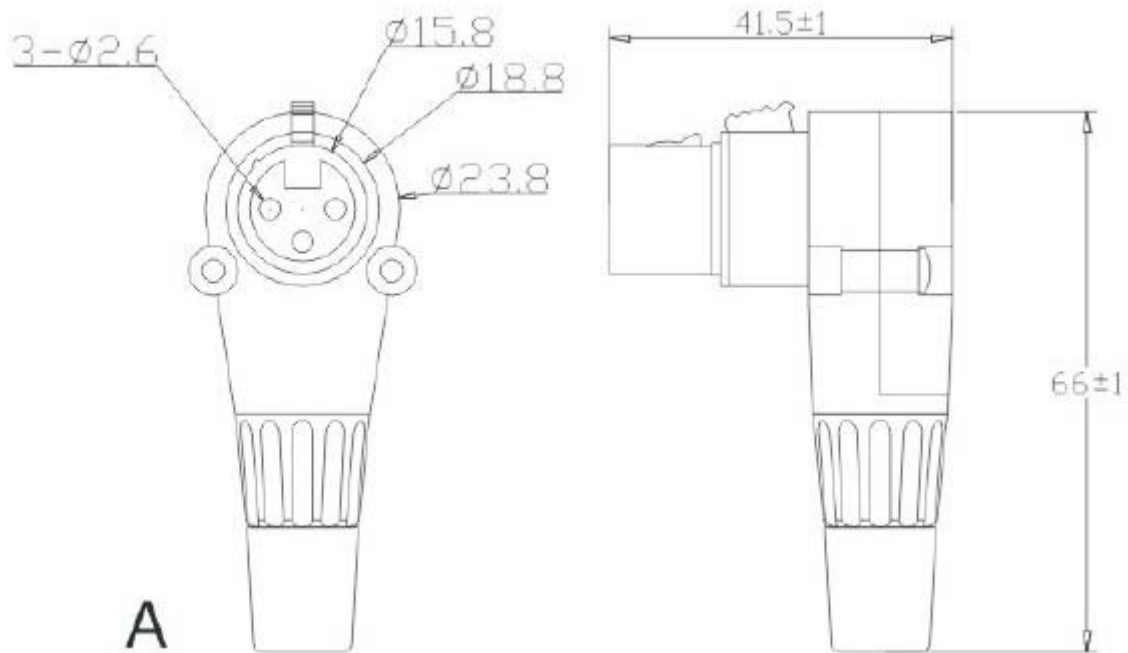

ORDER INFORMATION

Product NO.: KLS1-XLR-P02-03-F-B

Pos. NO.

XLR Jack series

L=Blue B=Black W=White

F=Female M=Male


03=3PIN

XLR CONNECTOR SERIES

KLS1-XLR-P02 (XLR Plug)

Electrical Specification:

Number of contacts: 3
Contact Resistance: ≤ 3 mOhms
Insulation Resistance Initial: > 2 GOhms
After Damp Heat Test: > 1 GOhms
Dielectric Strength: 1500 V dc
Rated current: 16 A
Mechanical Lifetime: > 1000 cycles
Insertion / Withdrawal Force: ≤ 20 N
Cable O.D. Range: 4.0 mm - 8.0 mm
Temperature Range: -30°C to $+80^{\circ}\text{C}$

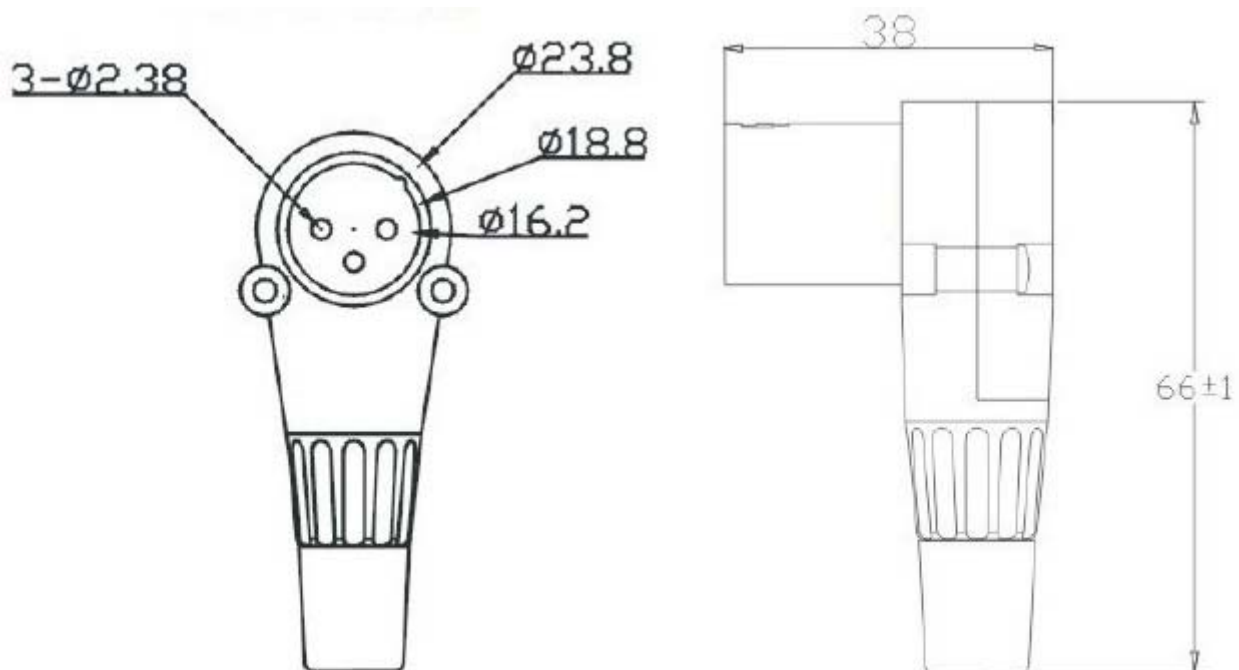

ORDER INFORMATION

Product NO.: KLS1-XLR-P02-03-M-B

Pos. NO.

XLR Jack series

L=Blue B=Black W=White

M=Male F=Female

03=3PIN