
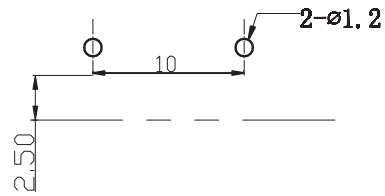
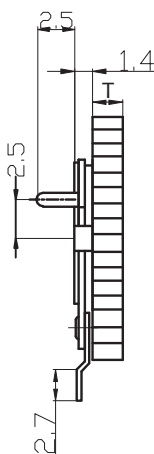

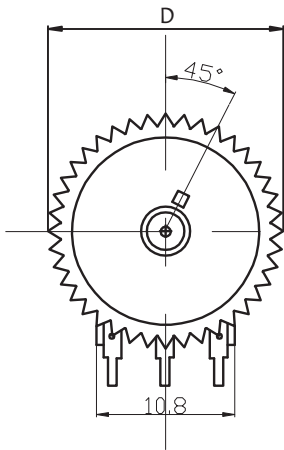


## Dial potentiometer Series

KLS4-RV014N1-B10K Dial potentiometer

### CHARACTERISTIC

- Total Resistance: 500Ω ~1M
- Total Resistance tolerance: plus or minus 20%
- Rated Power: 0.03W
- Maximum operating voltage: 50V AC 12V DC
- Impedance change characteristics: A B C D
- Residual Impedance: 20Ω
- Insulation resistance: 100MΩmin at 100V AC.
- Withstanding Voltage Less-than 100mv (at 20v dc)
- Synchronization error: 4DB
- Full rotation angle: 270 degrees
- Rotary Torque: 5 ~ 100GF. CM
- Rotation stopper strength: 0.6KGF. CM
- Pull the knob compression strength: 0.5KGF
- Potentiometer life: 10000 times

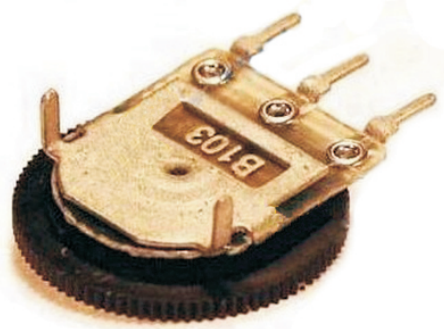

Mounting hole details

### Dial size

D	14	14	16	16	16	18	18	20	20
T	1	2	1	2	2.8	2	2.8	2	2.8

## ORDER INFORMATION

Product No.: KLS4-RV014N1-B10K-D\*T

Pos. No. \_\_\_\_\_ Dimensions (unit:mm)  
Dial potentiometer \_\_\_\_\_ Resistance