

SMD PTC RESETTABLE FUSE

KLS5-SMD2018 (SMD 2018 PTC RESETTABLE FUSE)

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
100 Part Identification

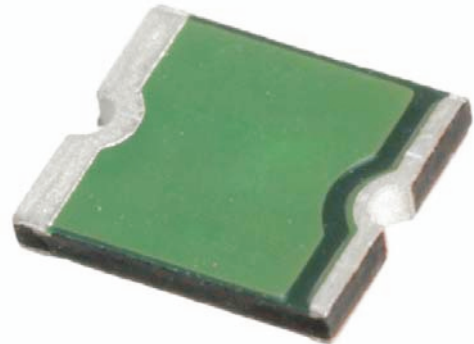


TABLE I. DIMENSIONS:(Unit:mm)

Model	A		B		C		D
	Min.	Max.	Min.	Max.	Min.	Max.	Min.
SMD2018-030	4.72	5.44	4.22	4.93	0.60	1.10	0.30
SMD2018-050	4.72	5.44	4.22	4.93	0.70	1.30	0.30
SMD2018-100	4.72	5.44	4.22	4.93	0.45	0.80	0.30
SMD2018-100-33V	4.72	5.44	4.22	4.93	0.45	0.80	0.30
SMD2018-150	4.72	5.44	4.22	4.93	0.45	0.80	0.30
SMD2018-200	4.72	5.44	4.22	4.93	0.40	0.80	0.30

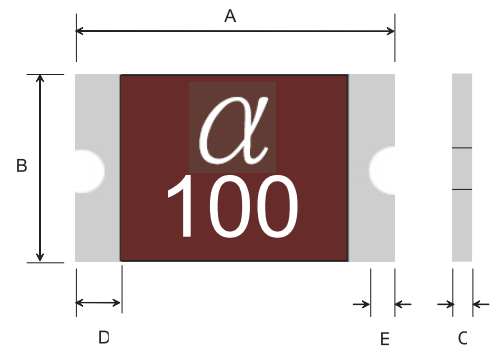


TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (V)	I _{max} (A)	I _{hold} @25°C (A)	I _{trlp} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	P _{i_min} (Ω)	P _{i_typ} (Ω)	P _{i_max} (Ω)
SMD2018-030	60	100	0.30	0.60	0.9	1.5	3.00	0.500	1.200	2.300
SMD2018-050	60	100	0.55	1.20	1.0	2.5	3.00	0.200	0.600	1.000
SMD2018-100	15	100	1.10	2.20	1.1	8.0	0.40	0.060	0.110	0.360
SMD2018-100-33V	33	100	1.10	2.20	1.1	8.0	0.40	0.060	-	0.360
SMD2018-150	15	100	1.50	3.00	1.1	8.0	0.80	0.050	0.060	0.170
SMD2018-200	10	100	2.00	4.00	1.1	8.0	2.40	0.030	0.045	0.100

ORDER INFORMATION

Product NO.: KLS5-SMD2018-010

