



KLS ELECTRONIC CO.,LTD.

Standard & General BLDC

	KLS23-B3650G	Output Power 输出功率: 1W~20W	Weight 重量: 330g (Approx.)
	Brushless DC Gear Motor-Typical Application 无刷直流减速电机-典型应用 Home Application: Electric door, Electric Window, Electric Curtain, Electric Awning 家用电器: 电动门, 电动窗, 电动窗帘, 电动遮阳棚 Industry Facility: Transmission Equipment, Gear System, Actuator 工业设备: 传动机械, 齿轮系统, 致动器 Power Tools: Electric Wrench, Percussion Drill 电动工具: 电动扳手, 电钻, 气体压缩机 Business Equipment: Electric Gate, Banking Facility, ATM, Vending Machine 商业设备: 电动门禁, 银行设施, ATM机, 售卖机 Personal Care: Massager 个人护理: 按摩器		


Model 型号	电压 Voltage(V)		No Load 空载		Rated Load 额定负载			Starting 启动		
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
B3650G-S01 (Gear Ratio 14:1)	8-26	12	128	0.18	0.42	100	0.66	4.43	1.98	2.47

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-30000hrs **特征:** 双转向, 信号功能, 锁定保护, 无级调速, 低噪音, 低电磁干扰, 超长寿命 10000-30000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power, gear box ratio & dimension, shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、齿轮箱的减速比和尺寸、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

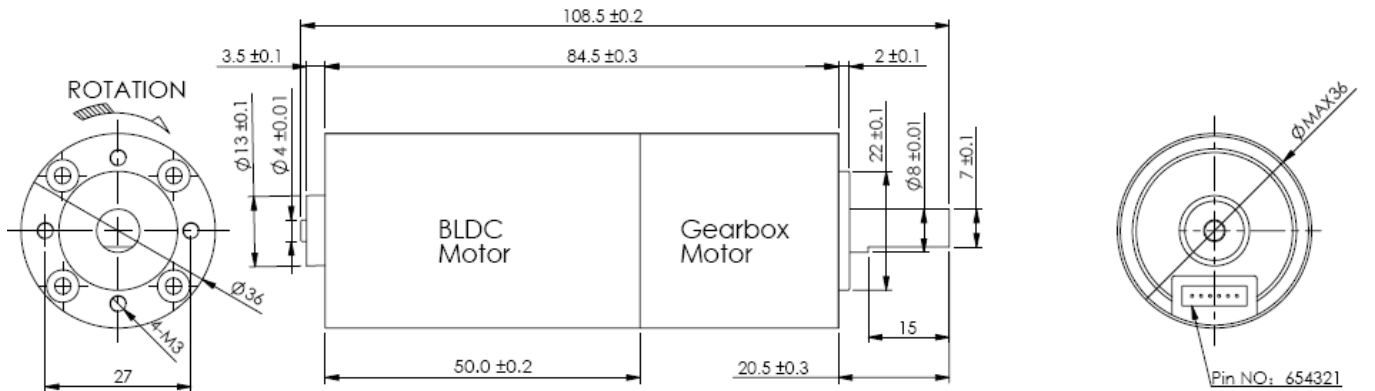

Unit: Millimeter

BLDC Motor Performance Curve 无刷电机性能曲线:

B3650G-S01(Bare Motor)

12V

