
	KLS23-B3657G	Output Power: 1W~25W	Weight: 350g (Approx.)
	Brushless DC Gear Motor-Typical Application Home Application: Electric door, Electric Window, Electric Curtain, Electric Awning Industry Facility: Transmission Equipment, Gear System, Actuator Electronic Equipment: Electric Valve, Small Switcher, Lighting Adjustor, Small Percussion Drill Business Equipment: Electric Gate, Banking Facility, ATM, Vending Machine Personal Care: Massager		

Model	Voltage(V)		No Load		Rated Load				Starting	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
B3657G-S01 (Gear Ratio 400)	8-26	24	5	0.013	2.0	4	0.089	1.29	10.4	0.58
B3657G-S02 (Gear Ratio 51)	8-26	24	133	0.42	1.0	124	1.13	18.6	4.52	4.00
B3657G-S03 (Gear Ratio 51)	8-26	24	102	0.38	2.25	83	2.08	19.6	7.64	4.00

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-30000hrs

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power, gear box ratio & dimension, shaft extension feature & dimension can be changed to meet customer specific requirement.


Outline Drawing: Unit: Millimeter

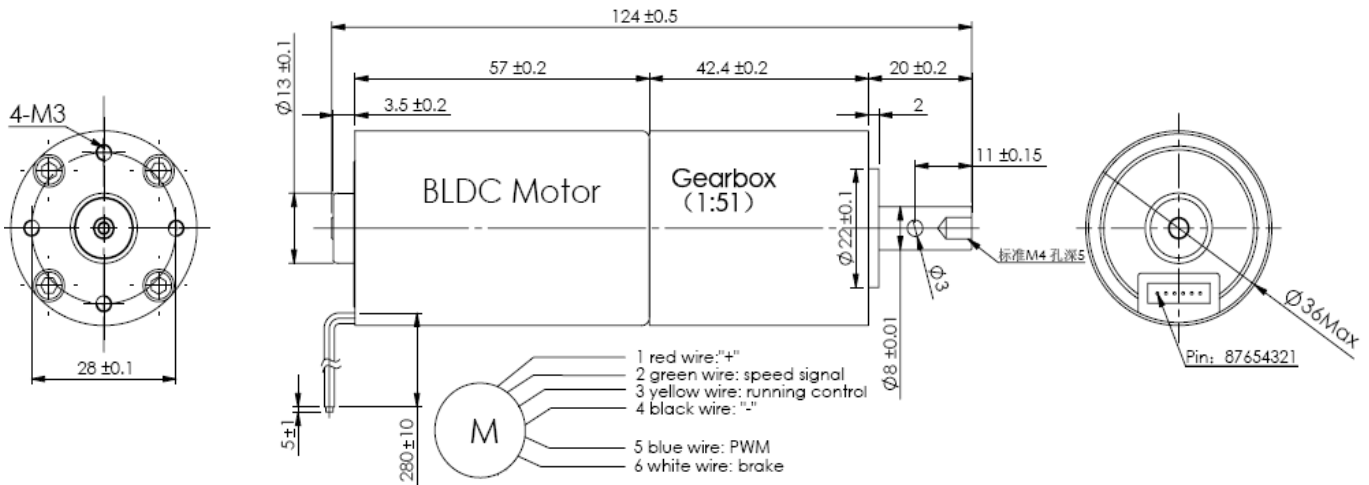

BLDC Motor Performance Curve :

B3657M-S01(Bare Motor)

24V

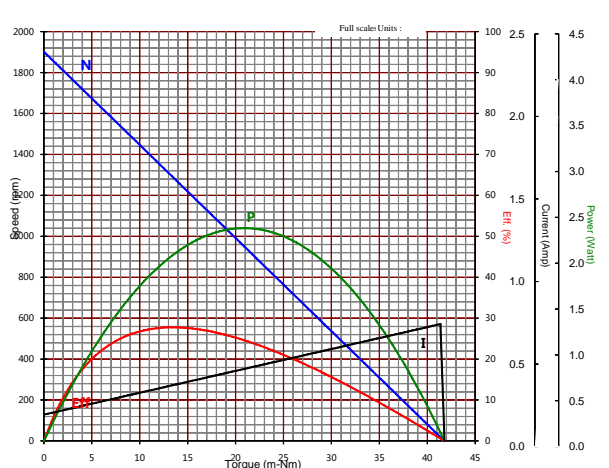

B3657M-S02(Bare Motor)

24V

