



KLS ELECTRONIC CO.,LTD

KLS23-PMSM10-64P032L & 64P048L



- Diameter: $\varnothing 64\text{mm}$
- Height: 43.5mm
- Step Angle: 11.25° , 7.5°



Typical Characteristics

Model Name	64P032L		64P048L	
Step Angle	11.25°		7.5°	
Drive Method	2-2 Phase		2-2 Phase	
Drive Circuit	Bipolar	Unipolar	Bipolar	Unipolar
Drive Voltage	24 V	24 V	24 V	36 V
Current/Phase	0.8 A	1.0 A	0.7 A	0.5 A
Coil Resistance/Phase	5 Ω	10 Ω	5 Ω	10 Ω
Holding Torque (reference)	2500 g-cm	3000 g-cm	2800 g-cm	2400 g-cm

Torque Characteristics

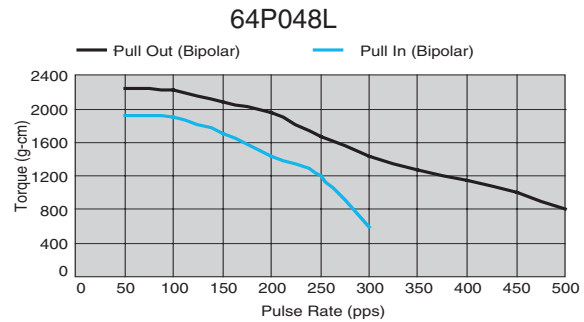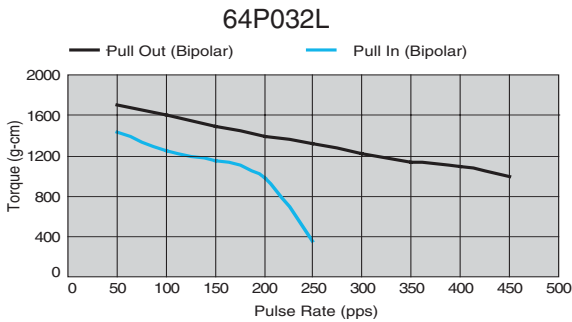

Typical Outline

