

HHS3R-N□ Series Timer



Description

HHS3R-N□




HHS3R-Y□




Specification

Model	HHS3R-N□	HHS3R-Y□
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)	
Operating mode	Circulation delay	
Time range	A: 1s/10s/1m/10m B: 3s/30s/3m/30m C: 6s/60s/6m/60m D: 1m/10m/1h/10h E: 3m/30m/3h/30h	
Repetitive error	$Er \leq 1\%$	
Contact	2C time delay	
Rated Load of the Contact	3A AC220V(Resistive)	
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)	
Installation	Surface mounting and 35mm DIN rail	Flush mounting

Wiring Diagram




Operation time sequence




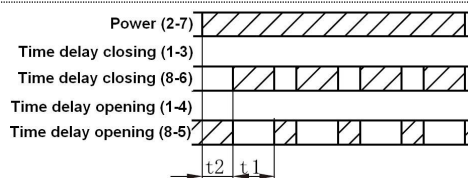


Dimension(mm) and Installation(mm)

HHS3R-N□




HHS3R-Y□




Application


Samples01



Samples02



Samples03



Samples04

