

Description

HHS3S




Specification


Model	HHS3S-2D	HHS3S-3D	HHS3S-3SM
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)		
Operating mode	Power on delay		
Time range	0.1s~9.9s 1s~99s 1m~99m	0.1m~9.9m 0.1s~99.9s 1s~999s 1m~999m	0.1s~99.9s 1s~999s 0.1m~99.9m 1m~999m
Repetitive error	The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Er ≤ 50ms.		
Contact	2C time delay		A mode: 2C time delay B mode: 1C time delay and 1C instantaneous
Rated Load of the Contact	3A AC220V(Resistive)		
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)		
Installation	Flush mounting		

Wiring Diagram

HHS3S-2D, HHS3S-3D




HHS3S-3SM




Operation time sequence

HHS3S-2D, HHS3S-3D, HHS3S-3SM A model

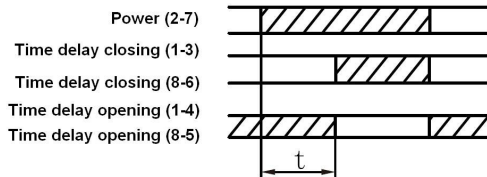


HHS3S-3SM B model

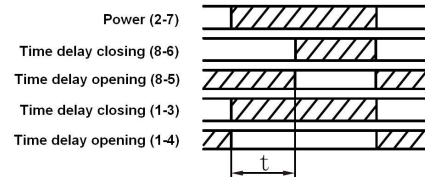


Dimension(mm) and Installation(mm)

HHS3S-CD, HHS3S-3D

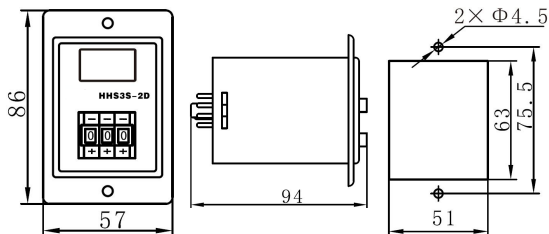


HHS3S-3SM

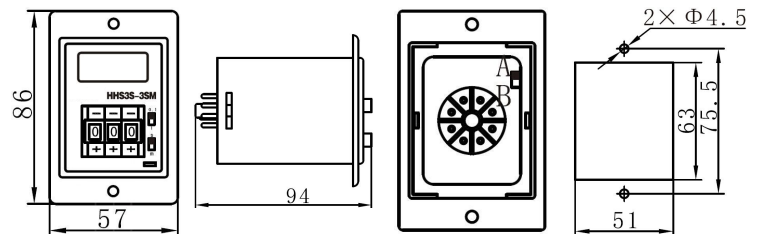


Application


Samples01



Samples02



Samples03



Samples04

