

## Description

HHS3S-A1



HHS3S-A2




## Specification


Model	HHS3S-A1	HHS3S-A1G	HHS3S-A2	HHS3S-A2G
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)			
Operating mode	Power on delay	Release delay	Power on delay	Release delay
Time range	0.01s~99.99s 1s~99min99s		1min~99h99m	
Repetitive error	The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Er ≤ 50ms.			
Contact	1C time delay(with Reset and Start function)		2C time delay	
Rated Load of the Contact	3A AC220V(Resistive)			
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)			
Installation	Flush mounting			

## Wiring Diagram


HHS3S-A1




HHS3S-A1G



HHS3S-A2




HHS3S-A2G




## Operation time sequence


HHS3S-A1

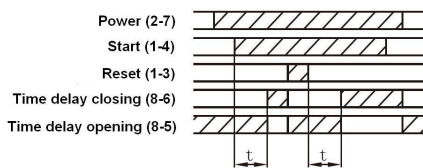


HHS3S-A2

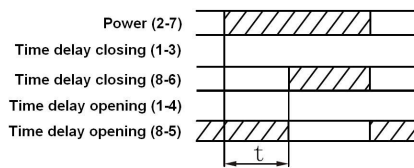




HHS3S-A1G

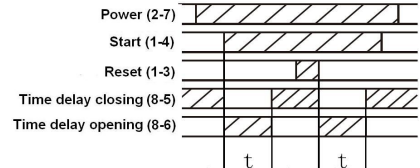

HHS3S-A2G

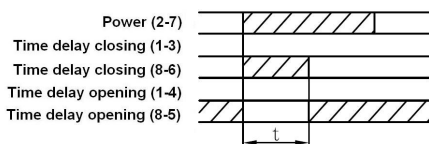


## Dimension(mm) and Installation(mm)




## Application


Samples01



Samples02



Samples03



Samples04

