

## Description


HHS6A-4




## Specification

Model	HH6A-4
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC48V(Operating voltage fluctuation range: 85% to 110% Ue)
Operating mode	Power on delay descending type
Time range	99.9s, 999s, 99.9m, 999m, 99.9h, 999h
Repetitive error	The range of time delay > 1s, $E_r \leq 1\%$ , the range of time delay < 1s, $D_r \leq 50\text{ms}$ .
Rated Load of the Contact	3A AC220V(Resistive)
Electrical Life	100000 operations min. (3 A at 250VAC/30VDC, resistive load)
Installation	Flush mounting


## Wiring Diagram



## Operation time sequence

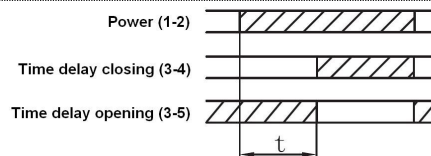


## Dimension(mm) and Installation(mm)

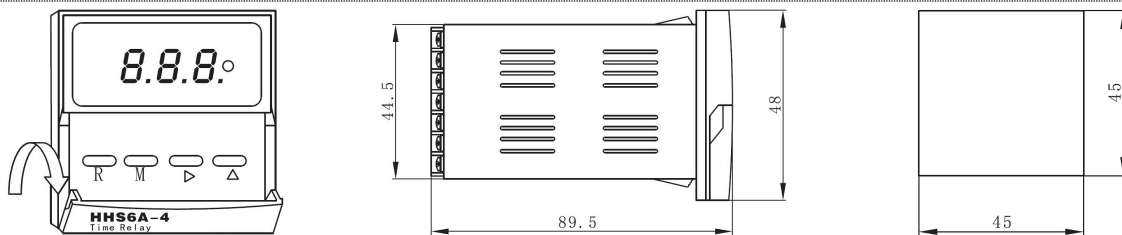


## Application


Samples01



Samples02



Samples03



Samples04

