

HHS11 Series Timer



Description

HHS11(JS11S), HHS11-1(DH11S)

HHS11P(JS11, JS11P), HHS11-2(JS11J), HHS11-3(JS11DN)




Specification


Model	HHS11(JS11S)	HHS11-1(DH11S)	HHS11-2(JS11J, JSS14)	HHS11-3(JS11DN)	HHS11P(JS11P)	HHS11P1(JS11)
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V (Operating voltage fluctuation range: 85% to 110% Ue)			AC380V 50Hz	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V (Operating voltage fluctuation range: 85% to 110% Ue)	
Operating mode	Power on delay					
Time range	9.9s, 99s, 99.99s, 999.9s, 9m59s, 9.9m, 99m, 99m59s, 99.9s, 999s, 999m, 9h59m, 99h59m, 99.9h, 9999s, 9999m, 0.01s~99h99m	0.01s~99.99s, 1s~99m99s, 1m~99h99m	99.9s, 999s, 999m, 99.99s, 9999s, 9999m	999s, 99.9s	99.9s, 999s, 999m, 99.99s, 9999s, 9999m	
Repetitive error	The range of time delay > 1s, $Er \leq 1\%$, the range of time delay < 1s, $Dr \leq 50ms$.					
Contact	1C instantaneous contact and 2C time delay contact			3C NO contact	1C instantaneous contact and 2C time delay contact	
Rated Load of the Contact	3A AC220V(Resistive)			5A AC380V	3A AC220V (Resistive)	
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)					
Installation	Flush mounting					

Wiring Diagram



HHS11-3(JS11DN)



HHS11P1(JS11), HHS11-2(JS11J)




HHS11(JS11S), HHS11P(JS11P), HHS11-2(JS11J, JSS14), HHS11-1(DH11S)




Dimension(mm) and Installation(mm)

HHS11(JS11S), HHS11-1(DH11S), HHS11P1(JS11) HHS11-2(JS11J), HHS11-3(JS11DN), HHS11P(JS11P), JSS14 with elliptical enclosure

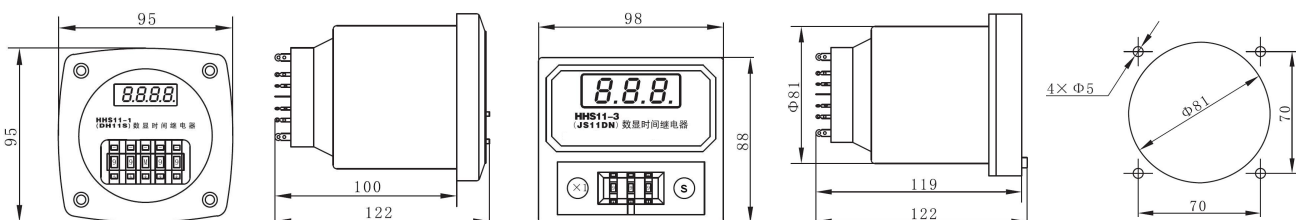


JSS14 with square enclosure

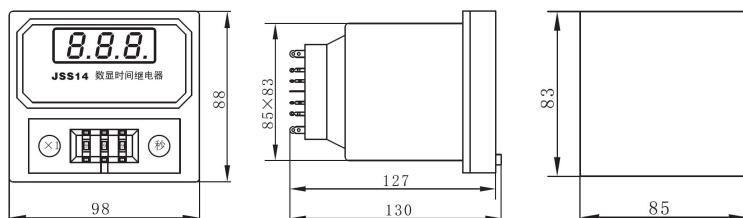


Application


Samples01



Samples02



Samples03



Samples04

