

Metallic Cable Glands

KLS8-0615M Metr Type Metallic Cable Glands

Material: Brass with nickel plated

Claw: Nylon plastic(PA), UL94-V2

Sealing: NBR


O-Sealing ring: NBR

Protection Class: IP68 (the wire/cable is in clamping range,
and assemble O-Ring on the groove)

Range of temperature: -40°C ~ 100°C



Item No.	Cable Range >Ø < (mm)	Outer diameter of thread (mm)	Mounting hole diameter (mm)	Thread length L(mm)	Joint length H(mm)	Wrench diameter (MM)
M12x1.5	3-6.5	12	12-12.2	5	18	14
M12x1.5S	2-5	12	12-12.2	5	18	14
M14x1.5	4-8	14	14-14.2	6	20	17
M14x1.5S	2-6	14	14-14.2	6	20	17
M16x1.5	4-8	16	16-16.2	6	20	17
M16x1.5S	5-10	16	16-16.2	6	21	20
M18x1.5	5-10	18	18-18.2	6	21	20
M18x1.5S	3-7	18	18-18.2	6	21	20
M20x1.5	6-12	20	20-20.2	6.5	22	22
M20x1.5S	10-14	20	20-20.2	6.5	23	24
M22x1.5	10-14	22	22-22.2	6.5	23	24
M22x1.5S	7-12	22	22-22.2	6.5	23	24
M24x1.5	10-14	24	24-24.2	6.5	23	24/27
M24x1.5S	7-12	24	24-24.2	6.5	23	24/27
M25x1.5	13-18	25	25-25.2	7	25	30
M25x1.5S	9-16	25	25-25.2	7	25	30
M27x1.5	13-18	27	27-27.2	7	25	30
M27x1.5S	9-16	27	27-27.2	7	25	30
M28x1.5	13-18	28	28-28.2	7	25	30
M28x1.5S	9-16	28	28-28.2	7	25	30
M32x1.5	18-25	32	32-32.2	8	30	40
M32x1.5S	16-21	32	32-32.2	8	30	40
M40x1.5	22-32	40	40-40.2	8	35	50
M40x1.5S	20-26	40	40-40.2	8	35	50
M50x1.5	32-38	50	50-50.2	9	38	57
M50x1.5S	25-31	50	50-50.2	9	38	57
M63x1.5	37-44	63	63-63.2	10	40	64
M63x1.5S	29-35	63	63-63.2	10	40	64

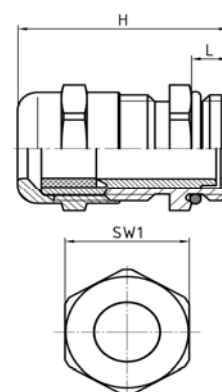

Order Information

KLS8-0615M-M12x1.5

0615M: M Type Metallic Cable Glands

M12x1.5: Item No.