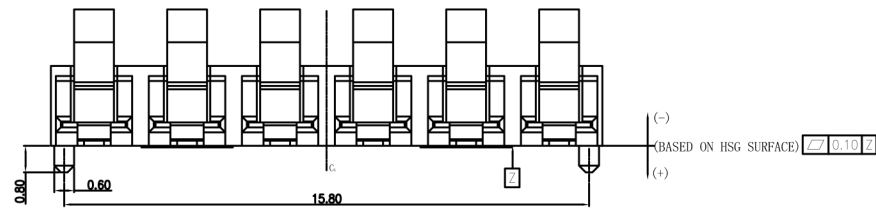
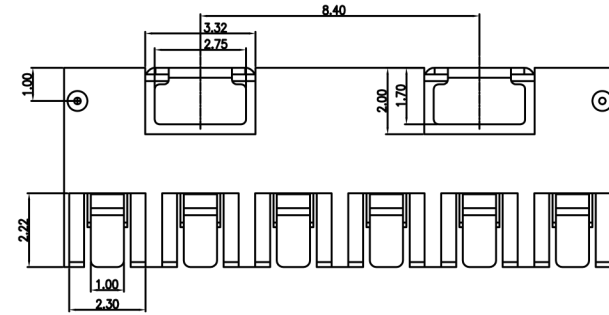
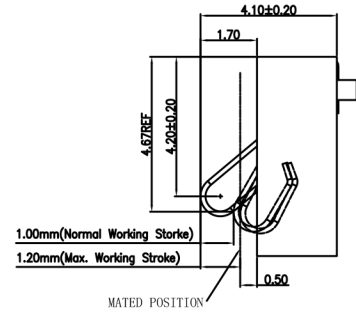
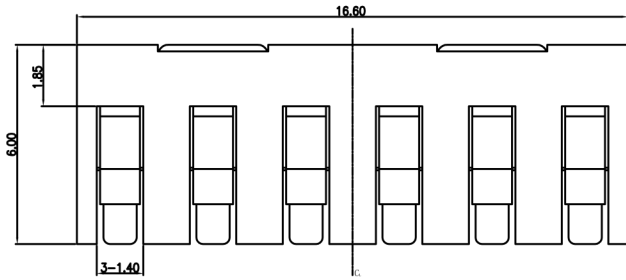




Recommended P.C.B Layout(Top Side)
Tolerance=±0.05



- NOTES:**
- Material&Finish:**
 Housing:High Temperature Thermoplastic UL94 V-0,Black
 Terminal:Copper Alloy
 Finish:Contact Area:Gold Flash Over Nickel
 Solder Area:Tin Plated Over Nickel
 Solder Tab:Copper Alloy
 Finish:Sn plated Over Nickel
 - ELECTRICAL SPECIFICATIONS:**
 VOLTAGE RATING: 250 VAC MIN
 CURRENT RATING: 2.0 A MIN
 DIELECTRIC STRENGTH: 500 VAC FOR 1 MINUTE MIN
 INSULATION RESISTANCE: 500 MEG OHM MIN
 CONTACT RESISTANCE: 30 MILL.OHM MAX
 OPERATION TEMPERATURE: -55° TO +125°
 PRODUCT WITHSTANDING REFLOW SOLDERING 245° FOR 10S
 - MECHANICAL SPECIFICATIONS:**
 4.1 DURABILITY: 5,000 CYCLES
 4.2 NORMAL FORCE AT WORKING POSITION: 80g±40g MIN.

				OPERATION	DRW	SCALE	1:1	 KLS ELECTRONIC CO.,LTD.
				~ 10 ±0.15	DESIGN	UNIT	mm	
				10 ~ 30 ±0.30	CHECK	SIZE	A4	PART NO.
				30 ~ ±0.40	APPROVE	SHEET	1/1	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	PROJ.		DRAWING NO.

KLS1-PBC23