


**Specification:**  
 Frequency : 824 ~960/1710 ~2170MHz  
 Gain : 5dBi  
 VSWR : 2.0 Max.  
 Impedance : 50 Ω  
 Polarization : Vertical  
 Radiation : OMNIDIRECTIONAL  
 Max power : 30W  
 Connector : SMA-J  
 Cable: RG174, Black  
 Length: 3000mm  
 Lightning protection: DC Grounding  
 Operating Temperature : -30°C to +70°C

**Order Information**

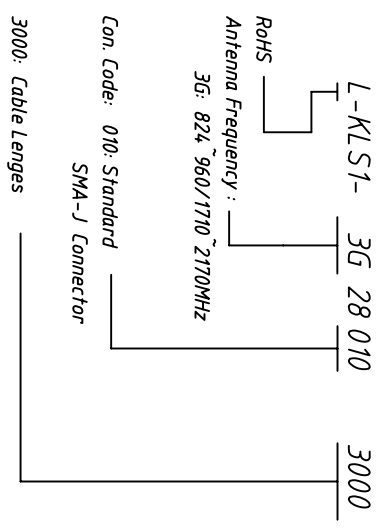

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
				UNITS			
X.	±0.60	X.	±5°	MM	⊕	3G Antenna	
.X	±0.38	.X	±3°	A4	⊖		
.XX	±0.25	.XX	±2°	SHEET SIZE		KLS P/N: KLS1-3G28010XXXX	
Draw by: Date		2016-11-11		KLS P/N:		KLS1-3G28010XXXX	
Check by: Date		2016-11-11		SHEET			
SCALE				OF			

**KLS ELECTRONIC CO., LTD.**