

Modular Jacks





KLS12-109A

Materials:

- HOUSING : PBT (UL 94V-0)
PA46 (UL 94V-0)
PA66 (UL 94V-0)
- CONTACT WIRE :
1. FLAT PINS : 0.35MM THICKNESS PHOSPHOR
BRONZE ALLOY SELECTIVE
GOLD PLATING OVER NICKEL
2. ROUND PINS: DIAMETER 0.46MM
PHOSPHOR BRONZ GOLD
PLATING OVER NICKEL



XII

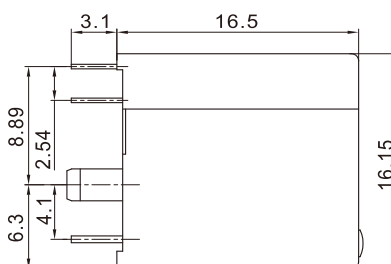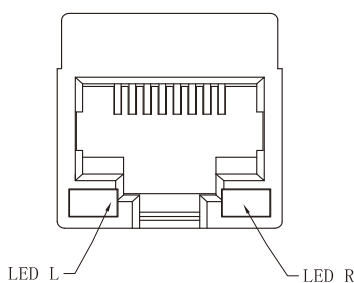

PC BOARD LAYOUT

CODE	LED-L (LEFT)	LED-R (RIGHT)	CODE	LED-L (LEFT)	LED-R (RIGHT)
0	NO LED	NO LED	A	GREEN/RED (绿/红)	GREEN/RED (绿/红)
1	GREEN (绿色)	YELLOW (黄色)	B	GREEN/YELLOW (绿/黄)	GREEN/YELLOW (绿/黄)
2	YELLOW (黄色)	GREEN (绿色)	C	YELLOW (黄色)	GREEN/ORANGE (绿/橙)
3	GREEN (绿色)	GREEN (绿色)	D	YELLOW (黄色)	GREEN/YELLOW (绿/黄)
4	RED (红色)	GREEN (绿色)	E	GREEN (绿色)	YELLOW/ORANGE (黄/橙)
5	YELLOW (黄色)	YELLOW (黄色)	F	GREEN (绿色)	GREEN/ORANGE (绿/橙)
6	GREEN (绿色)	RED (红色)			

ORDER INFORMATION

KLS12-109A-8PXC-X-X-X-X

(2C) (4C)
(6C) (8C)

LED STYLE (LED 颜色类型)

FU" 1.5U"
3U" 6U"
15U" 30U"
50U"

PBT NYLON66 (尼龙66)
NYLON46 (尼龙46)

ROUND PIN (圆针) FLAT PIN (扁针)