Connectors

Battery Holders


KLS5-844


NOTE:



- 2.Flammability Rating: UL94-HB or Custom Made
- 3.Temperature Range: -10°C to 100°C
- 4.PC Pins: Ø0.8*24mm, Brass Nickel Plated
- 5.Spring: 0.65mm 65C Spring Wire, Nickel Plated
- 6.Rivets: Brass, Nickel Plated
- 7.RoHS COMPLIANT





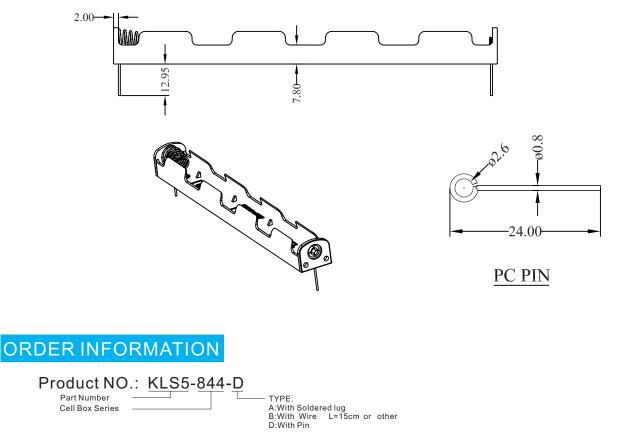

All specification & dimensions are subject to change, please call your nearest KLS sales represesntative for update information



Connectors


Battery Holders

KLS5-844

NOTE:

- 1.Base Material: PP Resin,Black
- 2.Flammability Rating: UL94-HB or Custom Made
- 3. Temperature Range: -10 $^\circ \! \mathbb{C}$ to 100 $^\circ \! \mathbb{C}$
- 4.Wire: UL1007 26 AWG,300V,80°C
 - 150±5mm,Strip and Tin 5±1mm
- 6.Spring: 0.65mm 65C Spring Wire, Nickel Plated
- 7. Rivets: Brass, Nickel Plated
- 8.RoHS COMPLIANT



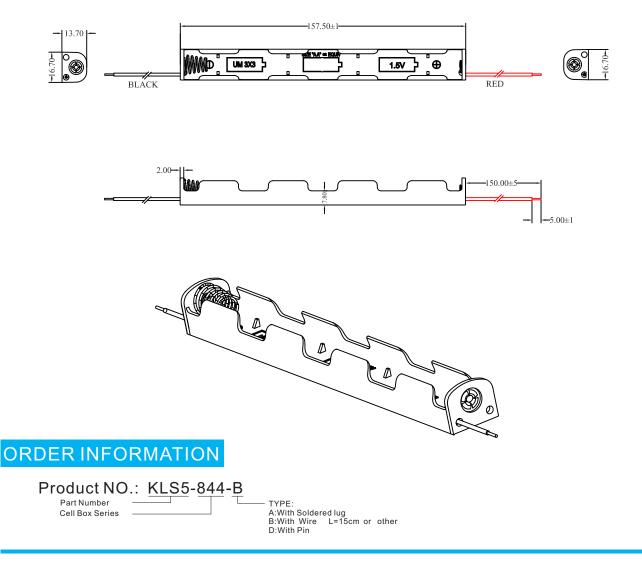

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information



