


SECTION A-A

Material
 Pin header: Brass, Tin plated
 Housing: LCP, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 8A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +130 °C
 Soldering: 285 °C±5 °C for 10S

Order Information

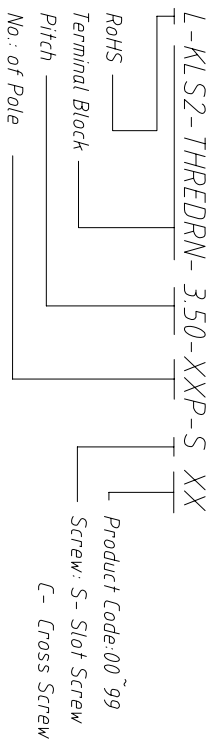

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
Draw by: Date		2015-09-01	
Check by: Date		2015-09-15	
SCALE	SHEET	OF	

KLS ELECTRONIC CO., LTD.

Through hole reflow 3.50mm

KLS2-THREDRN-3.50-XXP-S