


SECTION A-A

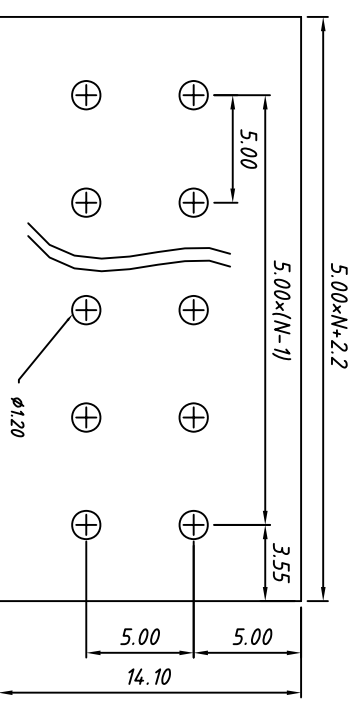

PCB LAYOUT

Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel

Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 26 ~14AWG 15mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C±5 °C for SS

Strip length: 5 ~6 mm

Order Information

L-KLS2-206-5.00-XXP-1 xx

Terminal Block

No. of Pole

Product Code:00~99
 Color: 1-Gray
 5-Orange

| GENERAL TOLERANCE | ANGLE TOLERANCE | PROJECTION | DESCRIPTION |
|---------------------|-----------------|------------|------------------------------------|
| X. ±0.60 | X. ±5° | XX ±2° | Spring Clamp Terminal Block 5.00mm |
| X ±0.38 | .X ±3° | mm | |
| XX ±0.25 | | mm | |
| Draw by 2015-09-01 | UNITS | SHEET SIZE | KLS P/N: KLS2-206-5.00-XXP-1 |
| Check by 2015-09-15 | SCALE | A4 | KLS ELECTRONIC CO., LTD. |