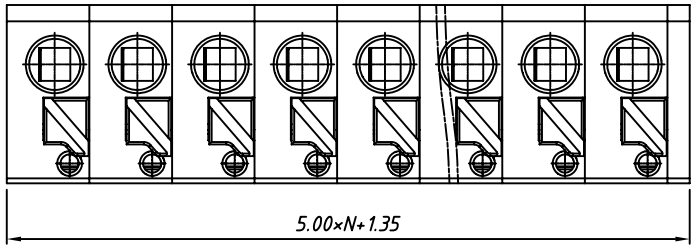

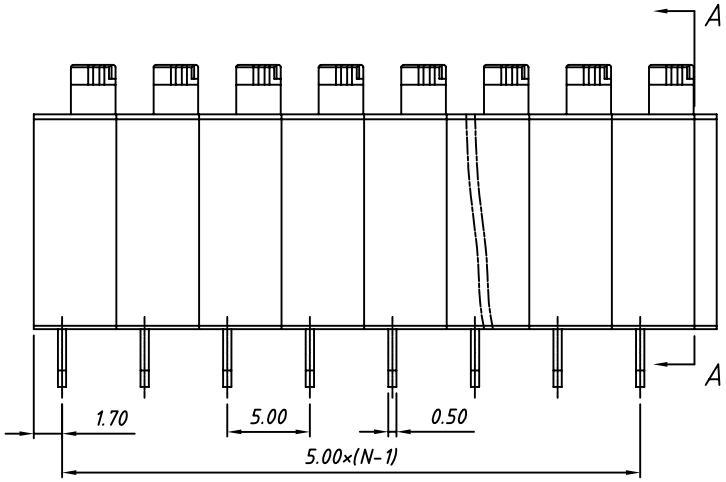

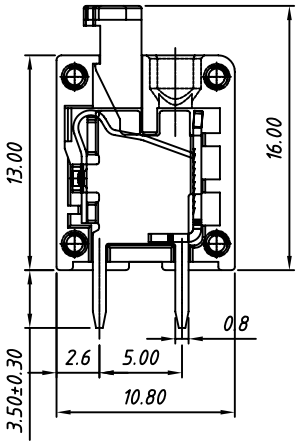

SECTION A-A

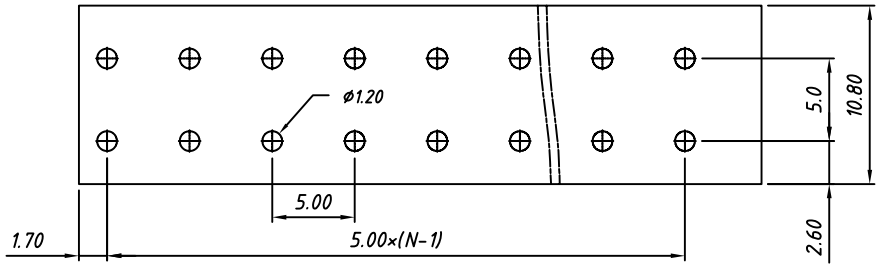

PCB LAYOUT

Material
Housing: PA66 , UL94V-0
Pin header: Brass, Tin plated
Wire guard: Stainless steel

Electrical
Rated voltage: 300V
Rated current: 8A
Wire range: 22~16AWG 1.5mm^2
Contact Resistance: 20 m Ω
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical
Temp. Range: -40 °C ~ + 105 °C
Soldering: 250° C±5° C for 5S
Strip length: 9~10mm

Order Information

L-KLS2-236 - 5.00-XXP- 1 xx

RoHS
Terminal Block
Pitch
No.: of Pole
Color: 1-Gray
Product Code:00~99

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:
X. ±0.60		X. ±5°		Spring Clamp Terminal Block 5.00mm
.X ±0.38		.X ±3°		
.XX ±0.25		.XX ±2°		KLS P/N: KLS2-236-5.00-XXP-1
Draw by	2015-09-01	PROJECTION		KLS ELECTRONIC CO.,LTD.
Check by	2015-09-15	UNITS	mm	
SCALE		SHEET SIZE	A4	