


Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel

Electrical
 Rated voltage: 300V
 Rated current: 10A
 Wire range: 26~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C±5 °C for 5S
 Strip length: 5~6mm

Order Information

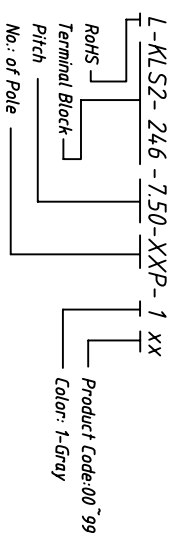

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X. ±0.60	X. ±5°	⌀	mm		
X ±0.38	.X ±3°				
XX ±0.25	.XX ±2°				
Draw by 2015-09-01	Check by 2015-09-15				
SCALE	SHEET SIZE				
Description:		Spring Clamp Terminal Block 7.50mm			
KLS P/N:	KLS2-246-750-XXP-1				
KLS ELECTRONIC CO., LTD.					