

**Material**  
 Screw: M4.0, Steel, Ni Plated  
 Pin header: Brass, 0.8t, Tin Plated  
 Housing: PA66, UL94V-0,Black


**Electrical**  
 Rated voltage: 300V  
 Rated current: 20A  
 Wire range: 22~12AWG 4.0mm<sup>2</sup>  
 Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 1.2Nm (10.6lb.in)

**Order Information**

L-KLS2- 55 C - 10.0-XXP-A

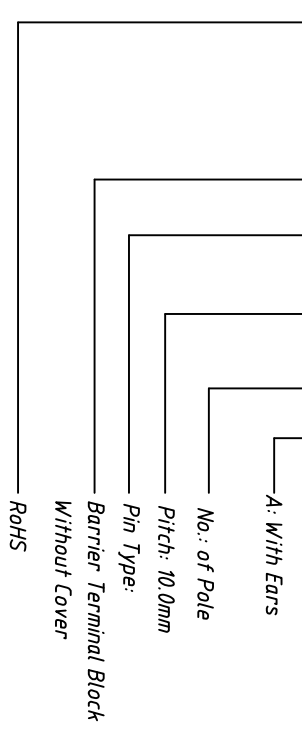

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°		UNITS
						mm	
						SHEET SIZE	
						A4	
						KLS P/N:	
						KLS2-55C-10.0-XXP-A	
Draw by: Date		2018-02-26					
Check by: Date		2018-02-26					
SCALE		SHEET		OF			

**KLS** NingBo KLS ELECTRONIC CO.,LTD.

Barrier TERM BLOCK 10.0MM

