

Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical


Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

L-KLS2-48 B-9.50-XXP-A

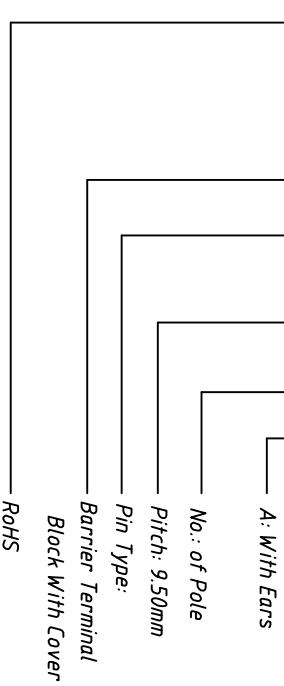

GENERAL TOLERANCE

X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

ANGLE TOLERANCE

X. ±5°
.X ±3°
.XX ±2°

PROJECTION

UNITS	mm
SHEET SIZE	A4
KLS P/N:	KLS2-48B-9.50-XXP-A

Description:

Barrier TERM BLOCK 9.50MM

KLS2-48B-9.50-XXP-A

Draw by: Date 2015-09-01
 Check by: Date 2015-09-15
 SCALE SHEET OF

KLS Ningbo KLS ELECTRONIC CO.,LTD.