


Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4mm²
 Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

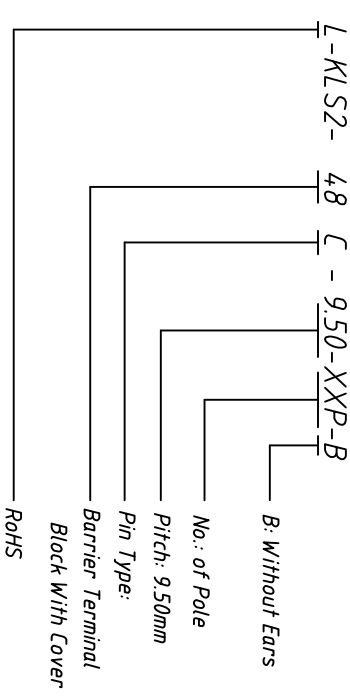

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	X: ±5°	UNIT	mm	Barrier TERM BLOCK 9.50MM			
X: ±0.38	X: ±3°	SHEET SIZE	A4				
XX: ±0.25	XX: ±2°	KLS P/N:	KLS2-48C-9.50-XXP-B				
Draw by: Date		2015-09-01		Ningbo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2015-09-15					
SCALE	SHEET	OF					

