


**Material**  
 Screw: M4.0, Steel, Ni Plated  
 Pin header: Brass, 0.8T, Tin Plated  
 Housing: PA66, UL94V-0,Black

**Electrical**  
 Rated voltage: 300V  
 Rated current: 20A  
 Wire range: 22~12AWG 4mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 1.2 Nm (10.6 Lb. In)

**Order Information**

L-KLS2-48 A - 11.0-XXP-B

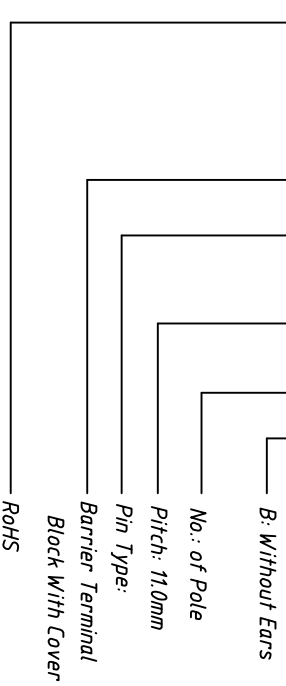

| GENERAL TOLERANCE |            | ANGLE TOLERANCE |        | PROJECTION |         | Description:                                     |
|-------------------|------------|-----------------|--------|------------|---------|--|
| X: ±0.60          | .X ±0.38   | .XX ±0.25       | X: ±5° | .X ±3°     | .XX ±2° |  |
| Draw by: Date     | 2015-09-01 |                 |        |            |         | Barrier TERM BLOCK 11.0MM<br>KLS2-48A-11.0-XXP-B |
| Check by: Date    | 2015-09-15 |                 |        |            |         |  |
| SCALE             | SHEET      | OF              |        |            |         |  |

**KLS** NingBo KLS ELECTRONIC CO.,LTD.