


**Material**  
 Screw: M4.0, Steel, Ni Plated  
 Pin header: Brass, 10T, Tin Plated  
 Housing: PA66, UL94V-0,Black


**Electrical**  
 Rated voltage: 600V  
 Rated current: 40A  
 Wire range: 18~10AWG 6mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 1.2 Nm (10.6 Lb. In)

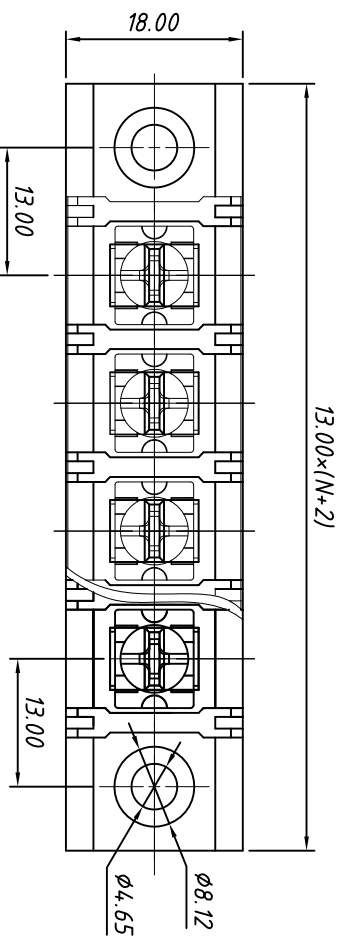

**Order Information**

L-KLS2-48 A-13.0-XXP-A

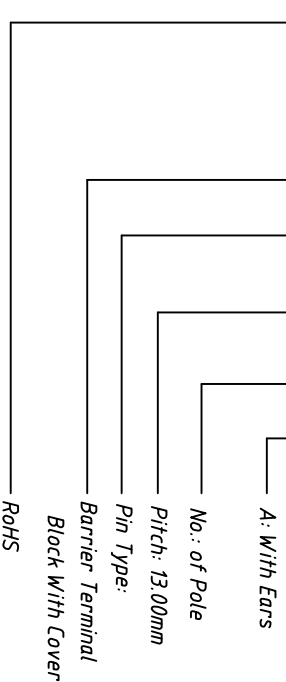

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°		UNITS
			mm		A4		Barrier TERM BLOCK 13.0MM
			KLS P/N:		KLS2-48A-13.0-XXP-A		
Draw by: Date		2015-09-01		SHEET		OF	
Check by: Date		2015-09-15		SCALE			

**KLS** NingBo KLS ELECTRONIC CO., LTD.