


Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 10T, Tin Plated
 Housing: PA66, UL94V-0,Black


Electrical
 Rated voltage: 600V
 Rated current: 40A
 Wire range: 18~10AWG 6mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

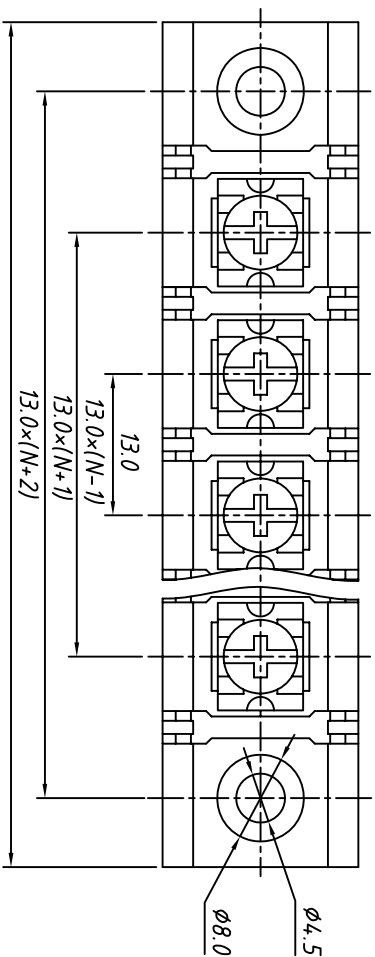

Order Information

L-KLS2-48 C-13.0-XXP-A

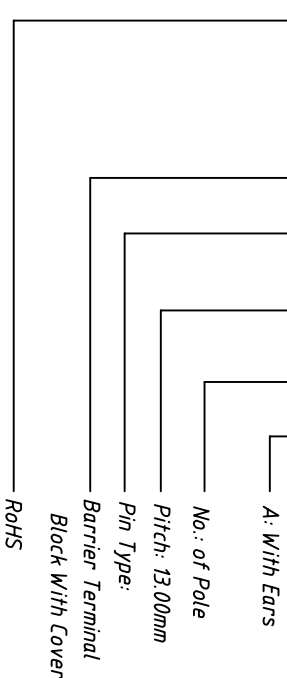

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
			mm		A4	
			SHEET SIZE		KLS P/N:	
			A4		KLS2-48C-13.0-XXP-A	
Draw by: Date		2015-09-01		Barrier TERM BLOCK 13.0MM		
Check by: Date		2015-09-15		KLS2-48C-13.0-XXP-A		
SCALE		SHEET		OF		

KLS Ningbo KLS ELECTRONIC CO., LTD.