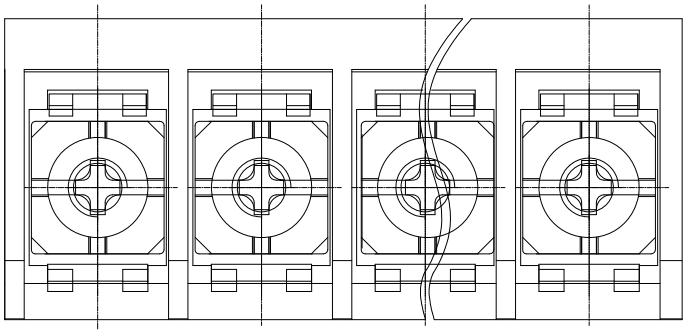

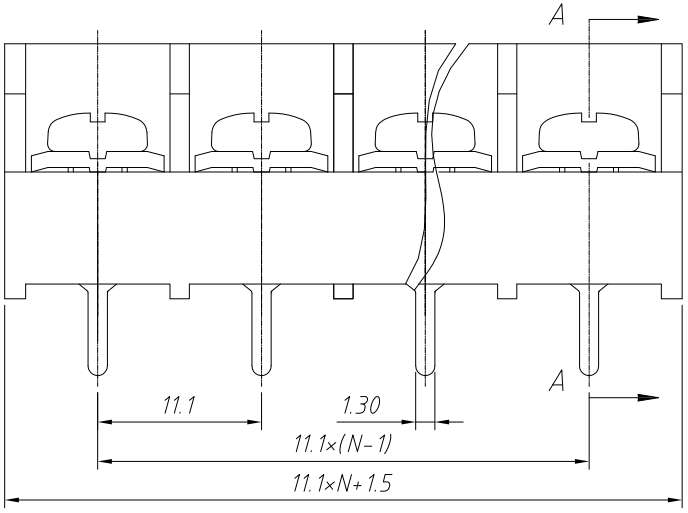

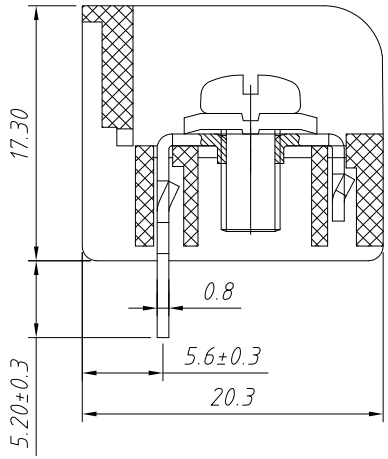

SECTION A-A

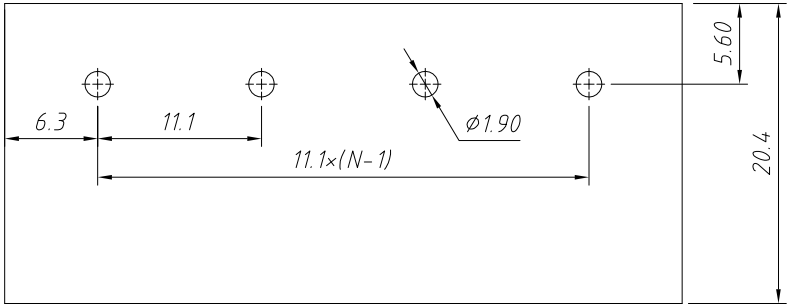

PCB LAYOUT

Material

Screw: M4.0,Steel,Ni Plated
Pin header: Brass, Tin Plated
Housing: PA66, UL94V-0,Black

Electrical

Rated voltage: 300V
Rated current: 30A
Wire range: 22~10AWG 4.0mm^2
Contact Resistance: 20 m Ω
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -40 °C ~ + 105 °C
Torque: 1.2Nm (10.6Lb.in)

Order Information

L-KLS2- 56 B - 11.0- XXP-B

- Color: B-Black
- No.: of Pole
- Pitch: 11.1mm
- Pin Type:
- Barrier Terminal Block
- RoHS

ANGLE TOLERANCE			Description:	Barrier TERM BLOCK 11.1MM
X. ±5°				
.X ±3°	PROJECTION:			
GENERAL TOLERANCE	UNITS:	mm	KLS P/N:	KLS2-56B-11.0-XXP-B
X. ±0.60	SHEET SIZE:	A4		
.X ±0.38	Draw by:	Daniel	2018-02-26	NingBo KLS ELECTRONIC CO.,LTD.
.XX ±0.25	Check by:	Daniel	2018-02-26	